

- 1N3154-1 THRU 1N3157-1 AVAILABLE IN JAN, JANTX, JANTXV AND JANS PER MIL-PRF-19500/158
- 8.4 VOLT NOMINAL ZENER VOLTAGE
- TEMPERATURE COMPENSATED ZENER REFERENCE DIODES
- METALLURGICALLY BONDED

1N3154 thru 1N3157A  
and  
1N3154-1 thru 1N3157A-1

## MAXIMUM RATINGS

Operating Temperature: -65°C to +175°C  
Storage Temperature: -65°C to +175°C  
DC Power Dissipation: 500mW @ +50°C  
Power Derating: 4 mW / °C above +50°C

## REVERSE LEAKAGE CURRENT

$I_R = 10\mu A$  @ 25°C &  $V_R = 5.5V_{dc}$

ELECTRICAL CHARACTERISTICS @ 25°C, unless otherwise specified.

JEDEC TYPE NUMBER	ZENER VOLTAGE	ZENER TEST CURRENT	MAXIMUM ZENER IMPEDANCE	VOLTAGE TEMPERATURE STABILITY	TEMPERATURE RANGE	EFFECTIVE TEMPERATURE COEFFICIENT
	$V_Z @ I_{ZT}$	$I_{ZT}$	ZZT (Note 1)	$\Delta V_{ZT}$ MAXIMUM (Note 2)	°C	% / °C
	VOLTS	mA	OHMS	mV	°C	% / °C
1N3154	8.00—8.80	10	15	130	-55 to +100	.01
1N3154A	8.00—8.80	10	15	172	-55 to +150	.01
1N3155	8.00—8.80	10	15	65	-55 to +100	.005
1N3155A	8.00—8.80	10	15	86	-55 to +150	.005
1N3156	8.00—8.80	10	15	26	-55 to +100	.002
1N3156A	8.00—8.80	10	15	34	-55 to +150	.002
1N3157	8.00—8.80	10	15	13	-55 to +100	.001
1N3157A	8.00—8.80	10	15	17	-55 to +150	.001

**NOTE 1** Zener impedance is derived by superimposing on  $I_{ZT}$  A 60Hz rms a.c. current equal to 10% of  $I_{ZT}$

**NOTE 2** The maximum allowable change observed over the entire temperature range i.e., the diode voltage will not exceed the specified mV at any discrete temperature between the established limits, per JEDEC standard No.5.

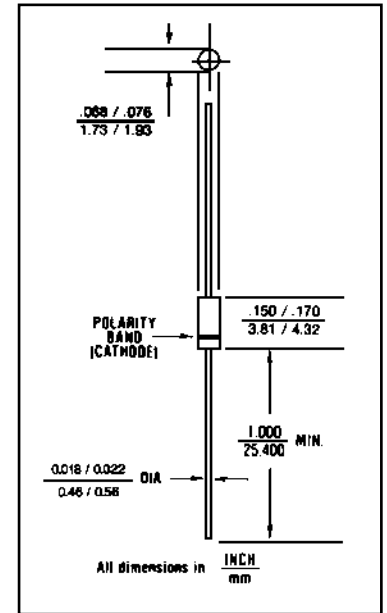


FIGURE 1

## DESIGN DATA

**CASE:** Hermetically sealed glass case. DO – 35 outline.

**LEAD MATERIAL:** Copper clad steel.

**LEAD FINISH:** Tin / Lead

**POLARITY:** Diode to be operated with the banded (cathode) end positive.


**MOUNTING POSITION:** ANY.




**COMPENSATED DEVICES INCORPORATED**

22 COREY STREET, MELROSE, MASSACHUSETTS 02176  
PHONE (781) 665-1071 FAX (781) 665-7379  
WEBSITE: <http://www.cdi-diodes.com> E-mail: [mail@cdi-diodes.com](mailto:mail@cdi-diodes.com)

# 1N3154 thru 1N3157A INCLUDING -1 VERSIONS

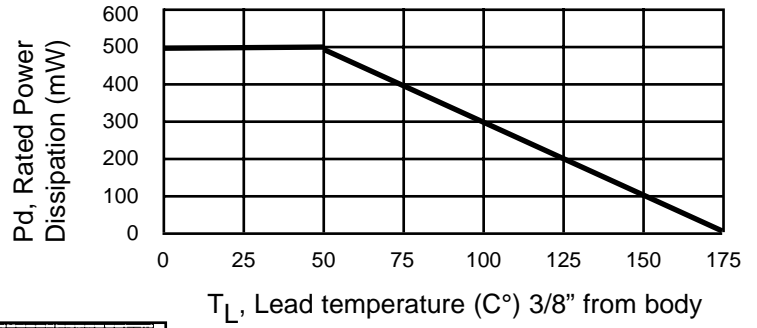


**FIGURE 2  
POWER DERATING CURVE**

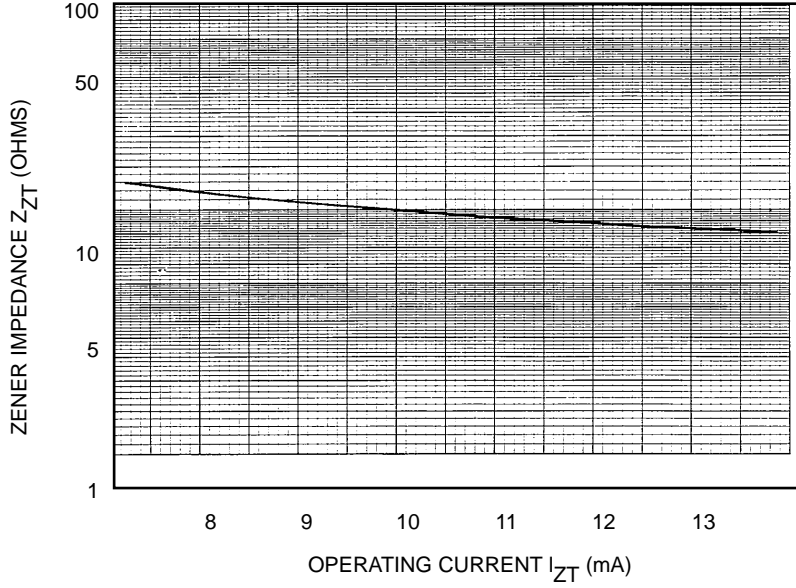

**FIGURE 3**

## ZENER IMPEDANCE VS. OPERATING CURRENT

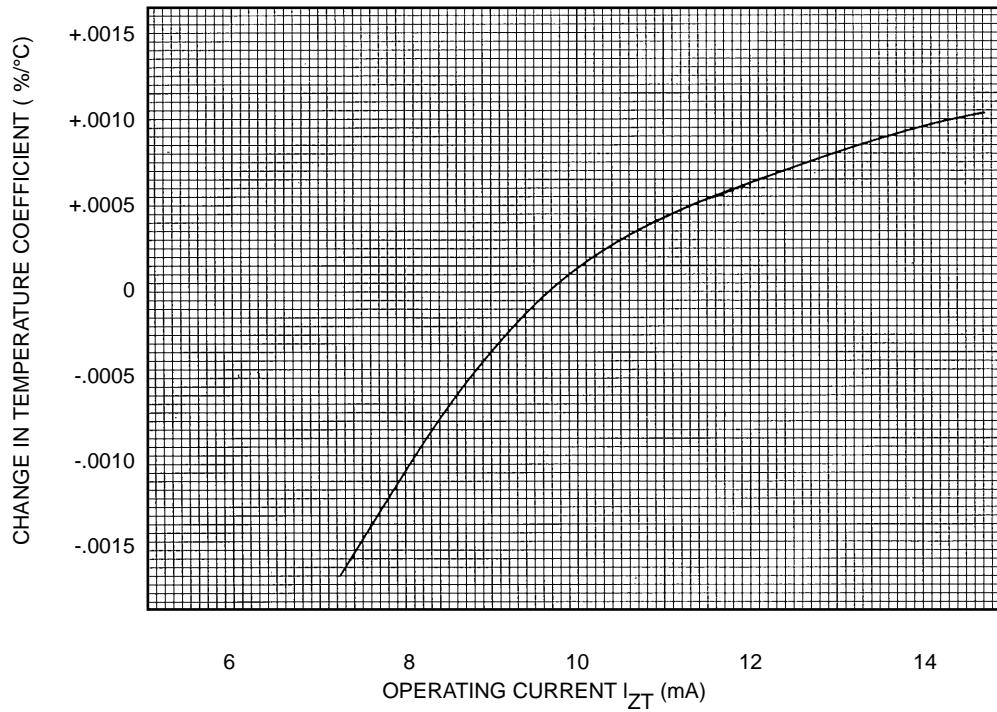

**FIGURE 4**

## TYPICAL CHANGE OF TEMPERATURE COEFFICIENT WITH CHANGE IN OPERATING CURRENT