



- ① Series name
- ② Single output
- ③ Output wattage
- ④ Input voltage  
48:DC36 - 76V
- ⑤ Output voltage
- ⑥ Optional  
M:with Mounting hole  
M3 tapped

| MODEL                 | CDS4004802 | CDS4004803 | CDS4004805 | CDS4004807 | CDS4004812 | CDS4004815 | CDS4004824 | CDS4004828 |
|-----------------------|------------|------------|------------|------------|------------|------------|------------|------------|
| MAX OUTPUT WATTAGE[W] | 200        | 330        | 400        | 405        | 500        | 510        | 504        | 504        |
| DC OUTPUT             | 2V 100A    | 3.3V 100A  | 5V 80A     | 7.5V 54A   | 12.5V 40A  | 15V 34A    | 24V 21A    | 28V 18A    |


## SPECIFICATIONS

|                                    | MODEL   | CDS4004802  | CDS4004803  | CDS4004805   | CDS4004807    | CDS4004812    | CDS4004815    | CDS4004824     | CDS4004828 |        |
|------------------------------------|---|---|-------------|--------------|---------------|---------------|---------------|----------------|------------|--------|
| INPUT                              | VOLTAGE[V]  | DC36 - 76   |             |              |               |               |               |                |            |        |
|                                    | CURRENT[A]  | *1 6typ   | 9typ        | 10typ        | 10typ         | 12typ         | 12typ         | 12typ          | 12typ      |        |
|                                    | EFFICIENCY[%]   | DCIN 48V, Io=100%   | 73typ       | 80typ        | 84typ         | 87typ         | 89typ         | 89typ          | 89typ      | 89typ  |
| DCIN 48V, Io=50%                   |   | 75typ   | 82typ       | 86typ        | 88typ         | 91typ         | 90typ         | 90typ          | 90typ      |        |
| OUTPUT                             | VOLTAGE[V]  | 2   | 3.3         | 5            | 7.5           | 12.5          | 15            | 24             | 28         |        |
|                                    | CURRENT[A]  | 100   | 100         | 80           | 54            | 40            | 34            | 21             | 18         |        |
|                                    | LINE REGULATION[mV]   | 10max   | 16max       | 20max        | 30max         | 40max         | 60max         | 95max          | 95max      |        |
|                                    | LOAD REGULATION[mV]   | 20max   | 30max       | 40max        | 60max         | 100max        | 150max        | 190max         | 190max     |        |
|                                    | RIPPLE[mVp-p]   | 0 to +85°C *2   | 80max       | 80max        | 80max         | 100max        | 120max        | 120max         | 120max     | 120max |
|                                    |   | -20 - 0°C *2  | 140max      | 140max       | 140max        | 150max        | 160max        | 160max         | 160max     | 160max |
|                                    | RIPPLE NOISE[mVp-p]   | 0 to +85°C *2   | 100max      | 100max       | 100max        | 140max        | 150max        | 150max         | 150max     | 150max |
|                                    |   | -20 - 0°C *2  | 150max      | 150max       | 150max        | 160max        | 180max        | 180max         | 180max     | 180max |
|                                    | TEMPERATURE REGULATION[mV]  | 0 to +65°C  | 25max       | 35max        | 50max         | 75max         | 120max        | 180max         | 280max     | 280max |
|                                    |   | -20 to +85°C  | 40max       | 60max        | 85max         | 130max        | 200max        | 310max         | 480max     | 480max |
|                                    | DRIFT[mV]   | *3 10max  | 16max       | 20max        | 30max         | 40max         | 60max         | 90max          | 90max      |        |
| START-UP TIME[ms]                  | 200max (DCIN 48V, Io=100%)  |   |             |              |               |               |               |                |            |        |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | Fixed (TRM pin open), 60 - 110% adjustable by external VR or external voltage |   |             |              |               |               |               |                |            |        |
|                                    | 1.0 - 2.2 *4  | 1.98 - 3.63   | 3.0 - 5.5   | 4.50 - 8.25  | 7.50 - 13.75  | 9.0 - 16.5    | 14.4 - 26.4   | 16.8 - 32.0 *5 |            |        |
| OUTPUT VOLTAGE SETTING[V]          | 1.95 - 2.10   | 3.25 - 3.45   | 4.90 - 5.20 | 7.25 - 7.85  | 12.00 - 13.00 | 14.40 - 15.60 | 23.04 - 24.96 | 26.88 - 29.12  |            |        |
| OVERCURRENT PROTECTION             | Works over 105% of rating and recovers automatically                          |   |             |              |               |               |               |                |            |        |
| OVERVOLTAGE PROTECTION[V]          | 2.80 - 4.50   | 4.00 - 5.50   | 5.75 - 7.00 | 8.60 - 10.50 | 14.35 - 17.50 | 17.25 - 21.00 | 27.60 - 33.60 | 33.00 - 39.20  |            |        |
| REMOTE SENSING                     | Provided  |   |             |              |               |               |               |                |            |        |
| REMOTE ON/OFF                      | Provided (On both side of input and output)                                   |   |             |              |               |               |               |                |            |        |
| INPUT-OUTPUT                       | DC1500V 1minute, DC500V 50MΩ min (20±15°C)                                    |   |             |              |               |               |               |                |            |        |
| INPUT-FG                           | DC1500V 1minute, DC500V 50MΩ min (20±15°C)                                    |   |             |              |               |               |               |                |            |        |
| OUTPUT-FG                          | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (20±15°C)             |   |             |              |               |               |               |                |            |        |
| OUTPUT-RC2,RC3                     | AC100V 1minute, Cutoff current = 100mA, DC100V 10MΩ min (20±15°C)             |   |             |              |               |               |               |                |            |        |
| ENVIRONMENT                        | OPERATING TEMP.,HUMID.AND ALTITUDE *6   | -20 to +85°C (On aluminum base plate), 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max |             |              |               |               |               |                |            |        |
|                                    | STORAGE TEMP.,HUMID.AND ALTITUDE  | -40 to +85°C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max  |             |              |               |               |               |                |            |        |
|                                    | VIBRATION   | 10 - 55Hz, 49.0m/s <sup>2</sup> (5G) 3minutes period, 60minutes each along X, Y and Z axis                            |             |              |               |               |               |                |            |        |
| IMPACT                             | 196.1m/s <sup>2</sup> (20G), 11ms, once each X, Y and Z axis                  |   |             |              |               |               |               |                |            |        |
| SAFETY                             | AGENCY APPROVALS  | UL60950-1, C-UL, EN60950-1  |             |              |               |               |               |                |            |        |
| OTHERS                             | CASE SIZE/WEIGHT  | 61 × 12.7 × 116.8mm (W × H × D) / 180g max  |             |              |               |               |               |                |            |        |
|                                    | COOLING METHOD  | Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)                       |             |              |               |               |               |                |            |        |

\*1 At rated input(DC48V) and rated load.  
 \*2 Ripple and ripple noise is measured by using measuring board with recommended capacitor Co & the film capacitor 0.1 μF.  
 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN:RM101).  
 \*3 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

\*4 When using with in the range of 1-1.2V ,please consult with us.  
 \*5 CDS4004828 : Output voltage adjustment range is 60 - 114.3%.  
 \*6 Please consult us in regard to use from -40°C.


External view

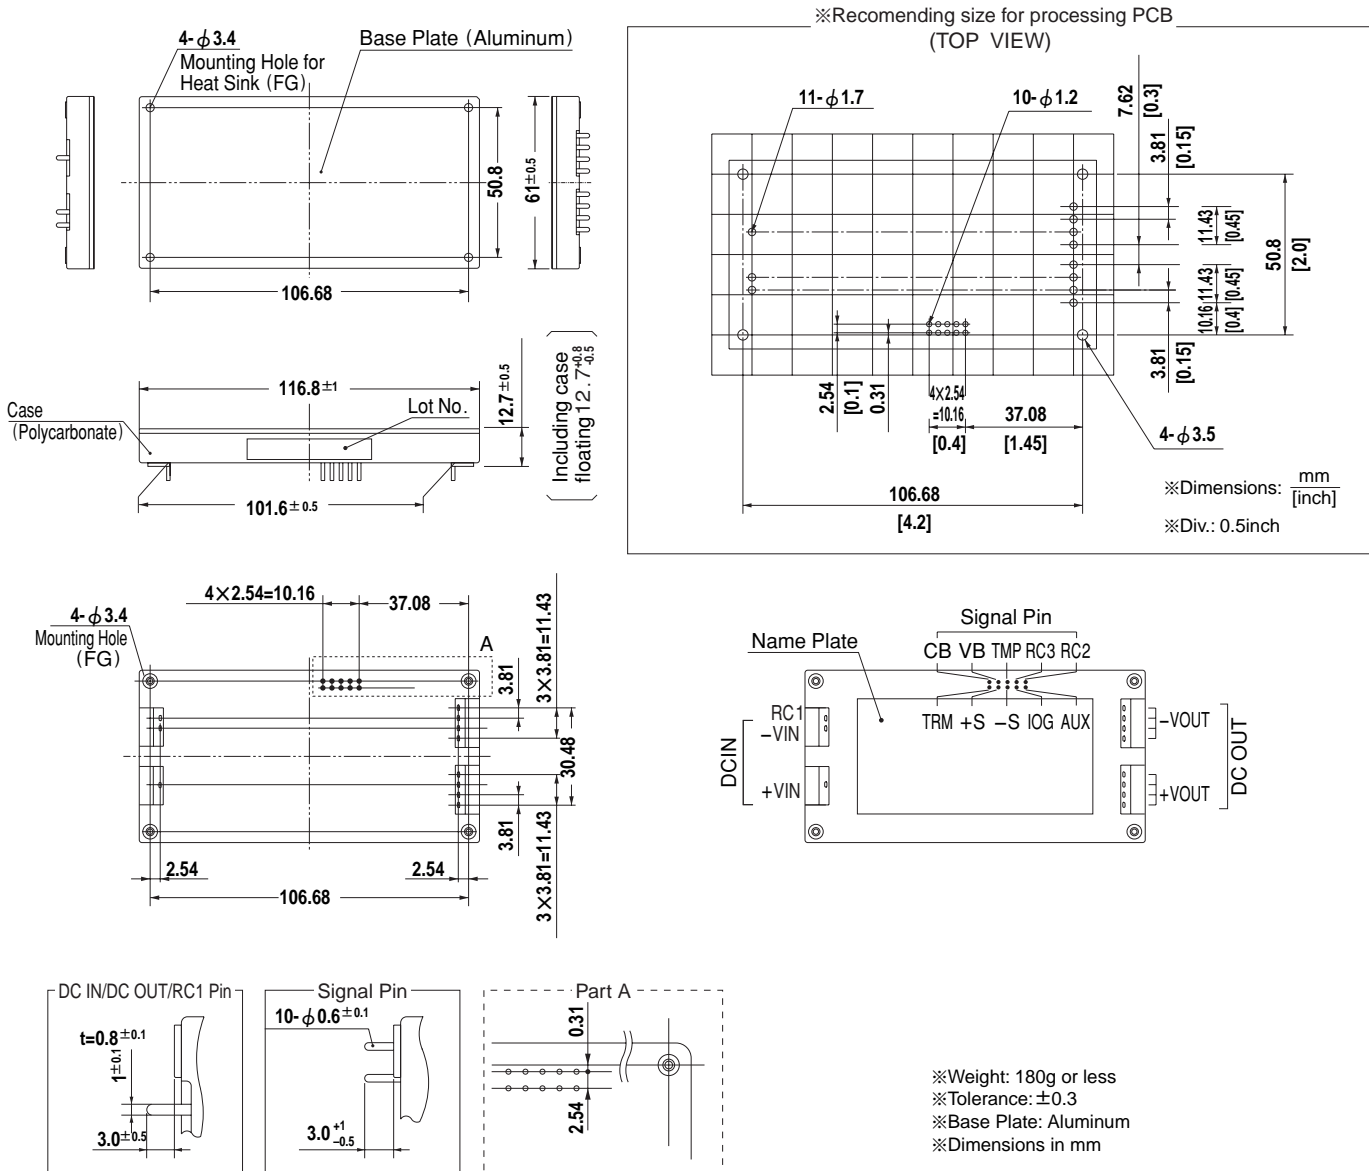


※Weight: 180g or less  
 ※Tolerance: ±0.3  
 ※Base Plate: Aluminum  
 ※Dimensions in mm

Performance data

INPUT CURRENT CHARACTERISTICS (CDS4004828)

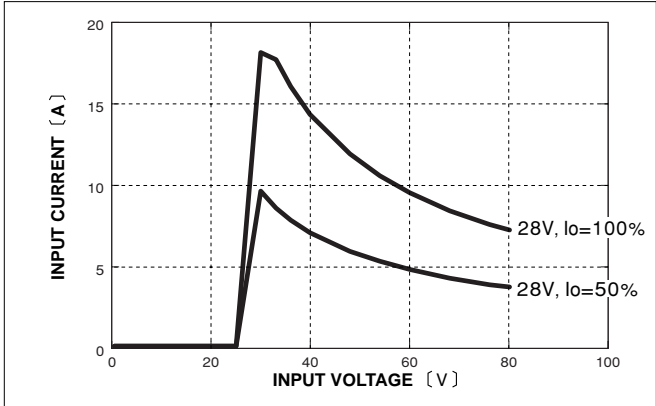


EFFICIENCY CHARACTERISTICS (CDS40048)

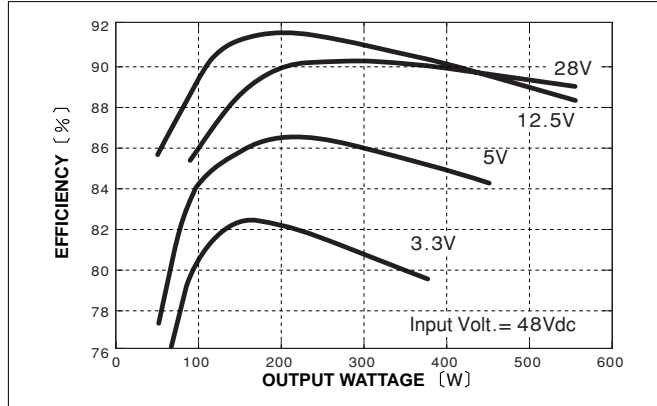

# CDS500/600

CD
S
600
48
12
□
-□

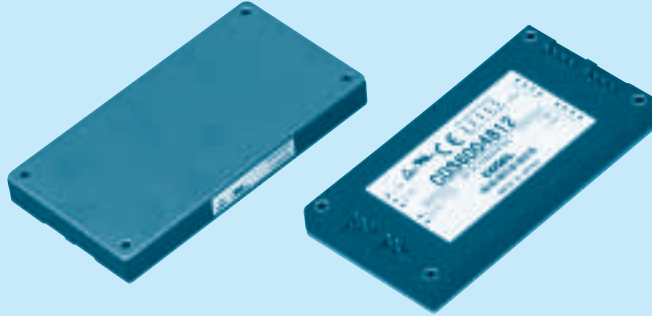

- ① Series name
- ② Single output
- ③ Output wattage
- ④ Input voltage  
24: DC18 - 36V  
48: DC36 - 76V
- ⑤ Output voltage
- ⑥ H: High Efficiency  
(24VIN Model only)
- ⑦ Optional  
M: with Mounting hole  
M3 tapped

| MODEL                 | CDS5002428H | CDS6002412 | CDS6002412H | CDS6002428 | CDS6002428H | CDS6004812 | CDS6004828 |
|-----------------------|-------------|------------|-------------|------------|-------------|------------|------------|
| MAX OUTPUT WATTAGE[W] | 504         | 600        | 600         | 616        | 616         | 700        | 700        |
| DC OUTPUT             | 28V 18A     | 12.5V 48A  | 12.5V 48A   | 28V 22A    | 28V 22A     | 12.5V 56A  | 28V 25A    |


## SPECIFICATIONS

|                                    | MODEL   | CDS5002428H   | CDS6002412       | CDS6002412H     | CDS6002428          | CDS6002428H     | CDS6004812                 | CDS6004828      |                 |
|------------------------------------|---|---|------------------|-----------------|---------------------|-----------------|----------------------------|-----------------|-----------------|
| INPUT                              | VOLTAGE[V]  | DC18 - 36   |                  | DC20.5 - 36     | DC18 - 36           | DC19 - 36       | DC36 - 76                  |                 |                 |
|                                    | CURRENT[A]  | *1 24typ  | 30typ            | 29typ           | 30typ               | 29typ           | 17typ                      | 17typ           |                 |
|                                    | EFFICIENCY[%]   | Io=100%   | 89typ(DCIN 24V)  | 83typ(DCIN 24V) | 87typ(DCIN 24V)     | 86typ(DCIN 24V) | 89typ(DCIN 24V)            | 89typ(DCIN 48V) | 89typ(DCIN 48V) |
| Io=50%                             |   | 90typ(DCIN 24V)   | 87typ(DCIN 24V)  | 90typ(DCIN 24V) | 87typ(DCIN 24V)     | 90typ(DCIN 24V) | 91typ(DCIN 48V)            | 90typ(DCIN 48V) |                 |
| OUTPUT                             | VOLTAGE[V]  | 28  | 12.5             | 12.5            | 28                  | 28              | 12.5                       | 28              |                 |
|                                    | CURRENT[A]  | 18  | 48               | 48              | 22                  | 22              | 56                         | 25              |                 |
|                                    | LINE REGULATION[mV]   | 95max   | 40max            | 40max           | 95max               | 95max           | 40max                      | 95max           |                 |
|                                    | LOAD REGULATION[mV]   | 190max  | 100max           | 100max          | 190max              | 190max          | 100max                     | 190max          |                 |
|                                    | RIPPLE[mVp-p]   | 0 to +85°C *2   | 120max           | 120max          | 120max              | 120max          | 120max                     | 120max          | 120max          |
|                                    |   | -20 - 0°C *2  | 160max           | 160max          | 160max              | 160max          | 160max                     | 160max          | 160max          |
|                                    | RIPPLE NOISE[mVp-p]   | 0 to +85°C *2   | 150max           | 150max          | 150max              | 150max          | 150max                     | 150max          | 150max          |
|                                    |   | -20 - 0°C *2  | 180max           | 180max          | 180max              | 180max          | 180max                     | 180max          | 180max          |
|                                    | TEMPERATURE REGULATION[mV]  | 0 to +65°C  | 280max           | 120max          | 120max              | 280max          | 280max                     | 120max          | 280max          |
|                                    |   | -20 to +85°C  | 480max           | 200max          | 200max              | 480max          | 480max                     | 200max          | 480max          |
| DRIFT[mV]                          | *3 90max  | 40max   | 40max            | 90max           | 90max               | 40max           | 90max                      |                 |                 |
| START-UP TIME[ms]                  | 200max (DCIN 24V, Io=100%)  |   |                  |                 |                     |                 | 200max (DCIN 48V, Io=100%) |                 |                 |
| OUTPUT VOLTAGE ADJUSTMENT RANGE[V] | Fixed (TRM pin open), 80 - 110% adjustable by external VR or external voltage |   |                  |                 |                     |                 |                            |                 |                 |
|                                    | 22.40 - 32.00 *4 *5   | 10.00 - 13.75   | 10.00 - 13.75 *5 | 22.40 - 30.80   | 22.40 - 32.00 *4 *5 | 10.00 - 13.75   | 22.40 - 32.00 *4           |                 |                 |
| OUTPUT VOLTAGE SETTING[V]          | 27.72 - 28.28 *6  | 12.00 - 13.00   | 12.00 - 13.00    | 26.88 - 29.12   | 26.88 - 29.12       | 12.00 - 13.00   | 26.88 - 29.12              |                 |                 |
| OVERCURRENT PROTECTION             | Works over 105% of rating and recovers automatically                          |   |                  |                 |                     |                 |                            |                 |                 |
| OVERVOLTAGE PROTECTION[V]          | 33.00 - 39.20   | 14.35 - 17.50   |                  | 33.00 - 39.20   |                     | 14.35 - 17.50   | 33.00 - 39.20              |                 |                 |
| REMOTE SENSING                     | Provided  |   |                  |                 |                     |                 |                            |                 |                 |
| REMOTE ON/OFF                      | Provided (On both side of input and output)                                   |   |                  |                 |                     |                 |                            |                 |                 |
| INPUT-OUTPUT                       | AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15°C)              |   |                  |                 |                     |                 |                            |                 |                 |
| INPUT-FG                           | AC500V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (20±15°C)              |   |                  |                 |                     |                 |                            |                 |                 |
| OUTPUT-FG                          | AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (20±15°C)             |   |                  |                 |                     |                 |                            |                 |                 |
| OUTPUT-RC2,RC3                     | AC100V 1minute, Cutoff current = 100mA, DC100V 10MΩ min (20±15°C)             |   |                  |                 |                     |                 |                            |                 |                 |
| ENVIRONMENT                        | OPERATING TEMP., HUMID. AND ALTITUDE *7                                       | -20 to +85°C (On aluminum base plate), 20 - 95%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max |                  |                 |                     |                 |                            |                 |                 |
|                                    | STORAGE TEMP., HUMID. AND ALTITUDE  | -40 to +85°C, 20 - 95%RH (Non condensing), 9,000m (30,000feet) max  |                  |                 |                     |                 |                            |                 |                 |
|                                    | VIBRATION   | 10 - 55Hz, 49.0m/s <sup>2</sup> (5G) 3minutes period, 60minutes each along X, Y and Z axis                            |                  |                 |                     |                 |                            |                 |                 |
| IMPACT                             | 196.1m/s <sup>2</sup> (20G), 11ms, once each X, Y and Z axis                  |   |                  |                 |                     |                 |                            |                 |                 |
| SAFETY                             | AGENCY APPROVALS  | UL60950-1, C-UL, EN60950-1  |                  |                 |                     |                 |                            |                 |                 |
| OTHERS                             | CASE SIZE/WEIGHT  | 61 × 12.7 × 116.8mm (W × H × D) / 200g max  |                  |                 |                     |                 |                            |                 |                 |
|                                    | COOLING METHOD  | Conduction cooling (e.g. heat radiation from the aluminum base plate to the attached heat sink)                       |                  |                 |                     |                 |                            |                 |                 |

\*1 At rated input(DC24,DC48V) and rated load.  
 \*2 Ripple and ripple noise is measured by using measuring board with recommended capacitor Co & the film capacitor 0.1 μF.  
 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN:RM101).  
 \*3 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


\*4 CDS5002428H,CDS6002428H,CDS6004828:Output voltage adjustment range is 80 - 114.3%.  
 \*5 CDS5002428H,CDS6002412H,CDS6002428H:When the output voltage adjustment range is 101% or more,the input voltage range is limited(Refer to Instruction Manual).  
 \*6 Aluminum baseplate temperature Tc=25°C  
 \*7 Please consult us in regard to use from -40°C.

External view

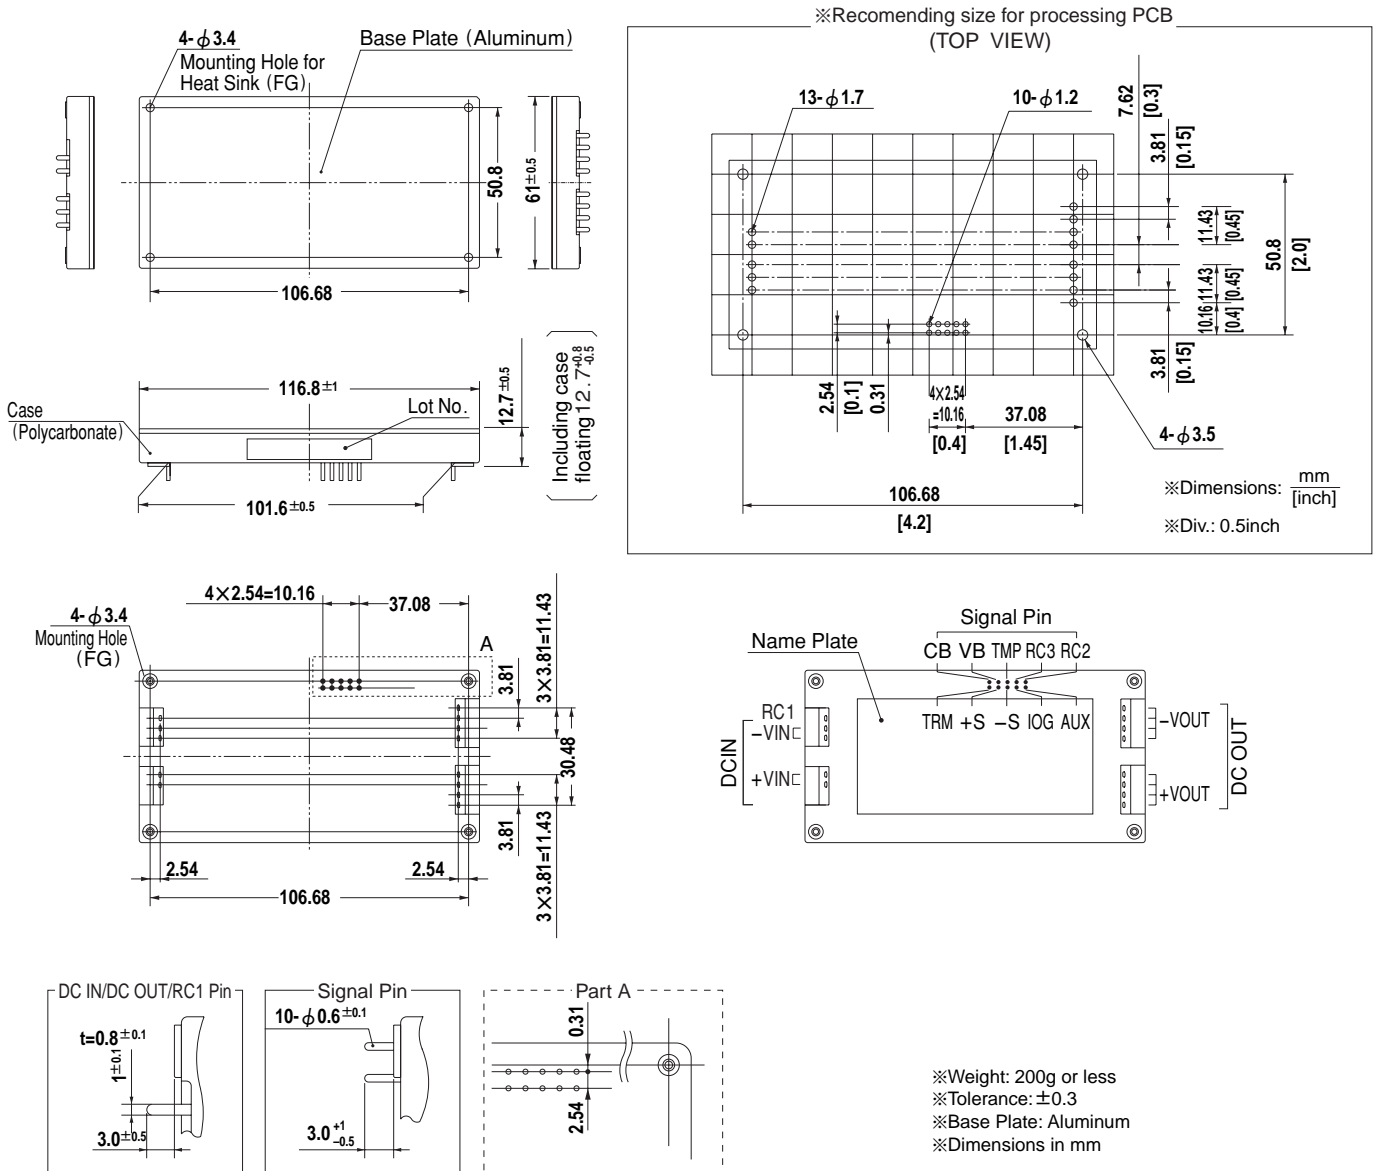

Performance data

INPUT CURRENT CHARACTERISTICS (CDS60048)

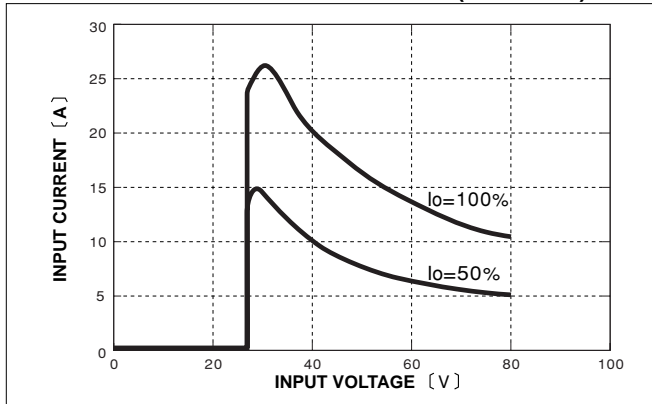

EFFICIENCY CHARACTERISTICS (CDS60048)

