




Details are subject to change without notice.

## **ADJUSTABLE TRIPLE-CHANNEL TFT LCD DC-DC CONVERTER**

### **Features**

- Built in 1.6A, 0.2 $\Omega$  Switching NMOS
- Fault and Thermal Protection
- Internal Soft-Start Function
- Internal Power Up Sequencing
- Dual Adjustable Charge Pump Output  
Positive Output to 40V  
Negative Output to -40V
- Power Good Output
- TSSOP-16 Package

### **Pin Configuration**

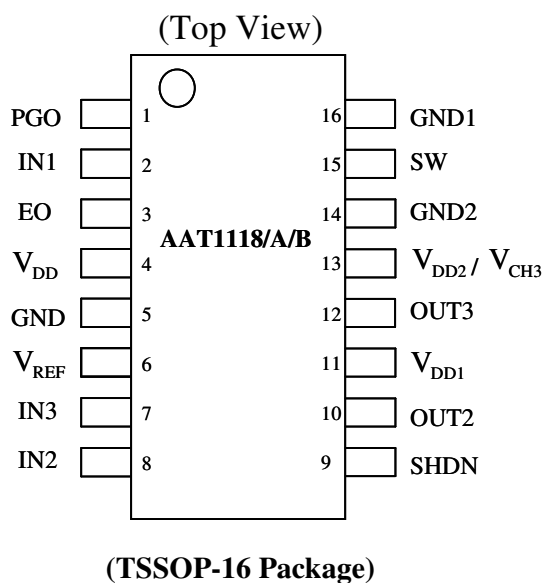

### **General Description**

The AAT1118/A/B is an adjustable triple-channel TFT LCD DC-DC converter that provides one current mode PWM, one positive charge pump and one negative charge pump. Built-in functions include soft-start and power up sequencing. When power is turned on, soft-start avoids inrush current. Power up sequencing feature provides compensation for LCD panel to maintain a smooth voltage during a turn-on cycle.

The DC-DC converter consists of an on-chip voltage reference, error amplifier, current sense, pulse width modulation controller, under-voltage lockout protection, thermal detect, soft-start, and fault protection circuit.

When the two charge pumps are in operation, the output voltage would be doubled and the generated VP3 and VP2 (Note 1) could switch on or off TFT gate.

With the minimal external components, the AAT1118/A/B offers a simple and economical solution for TFT LCD power.

Note 1: Please refer to page 13 and 14 for VP3 and VP2.



### Pin Description

PIN NO.	NAME	I/O	DESCRIPTION
1	PGO	O	HV Switch Output
2	IN1	I	Inverting Input Pin of PWM Error Amplifier
3	EO	I	Output Pin of PWM Error Amplifier
4	V <sub>DD</sub>	-	Power Supply
5	GND	-	Ground
6	V <sub>REF</sub>	O	Reference Voltage Output
7	IN3	I	Charge Pump Channel 3 Feedback Input
8	IN2	I	Charge Pump Channel 2 Feedback Input
9	SHDN	I	Shutdown Control Pin; High for Enable
10	OUT2	O	Charge Pump Channel 2 Output
11	V <sub>DD1</sub>	-	High Voltage Power Supply
12	OUT3	O	Charge Pump Channel 3 Output
13	V <sub>DD2</sub>	-	High Voltage Power Supply
	V <sub>CH3</sub>	O	Power Output for Channel 3 (AAT1118B Only)
14	GND2	-	Ground
15	SW	O	Switch Pin
16	GND1	-	SW MOS Ground



**Absolute Maximum Ratings**

PARAMETER	SYMBOL	VALUE	UNIT
$V_{DD}$ to GND	$V_{DD}$	7	V
SW to GND	$V_{SW}$	18	V
$V_{DD1}$ , $V_{DD2}$ to GND	$V_{DDH}$	16	V
Input Voltage 1 (IN1, IN2, IN3, SHDN)	$V_{I1}$	$V_{DD} + 0.3$	V
Output Voltage 1 (EO, $V_{REF}$ )	$V_{O1}$	$V_{DD} + 0.3$	V
Output Voltage 2 (OUT2, OUT3, SW, PGO)	$V_{O2}$	$V_{DDH} + 0.3$	V
Operating Free-Air Temperature Range	$T_C$	- 40 to + 85	°C
Storage Temperature Range	$T_{storage}$	- 45 to + 125	°C
Power Dissipation	$P_d$	750	mW



**Electrical Characteristics,  $V_{DD}=3.3V$ ,  $V_{DDH}=10V$**

**Operating Power**

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Supply Voltage Range	$V_{DD}$		2.6		5.5	V
VDD Under Voltage Lockout	$V_{UVLO}$	Falling	2.1	2.2	2.3	V
		Rising	2.3	2.4	2.5	V
Regulated Output Voltage Range	$V_{PI}$		6		14	V
Quiescent Current	$I_{VDD}$	$V_{IN1}=1.3V$ , not switching		0.5	0.8	mA
		$V_{IN1}=1.1V$ , switching		3	6	mA
Shutdown Current	$I_{SHDN}$	$V_{SHDN}=GND$		0.1	10.0	$\mu A$
Thermal Shutdown				160		$^{\circ}C$

**Reference Voltage**

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Reference Voltage	$V_{REF}$	$I_{Vref}=100\mu A$	1.238	1.250	1.262	V
Line Regulation	$V_{RI}$	$I_{Vref}=100\mu A$ , $V_{DD}=2.5V\sim 5V$	-	2	5	mV
Load Regulation	$V_{RO}$	$I_{Vref}=0\sim 100\mu A$	-	1	5	mV

**EA (Error Amplifier)**

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Feedback Voltage	$V_{IN1}$	Level to produce $V_{EO}=1.24V$	1.238	1.250	1.262	V
Input Bias Current	$I_{BI}$	$V_{IN1}=1.24V$		0	40	nA
Feedback-Voltage Line Regulation	$V_{RI}$	Level to produce $V_{EO}=1.24V$ $2.6V < V_{DD} < 5.5V$		0.05	0.15	%/V
Transconductance	$g_m$	$\Delta I=5\mu A$	70	105	240	$\mu A/V$
Voltage Gain	$A_v$			1,500		V/V
Fault Detect Trigger Voltage	$V_{FI}$		1.07	1.10	1.14	V



**Electrical Characteristics,  $V_{DD} = 3.3V$ ,  $V_{DDH} = 10V$**

**Oscillator**

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Oscillation Frequency	$f_{OSC}$		1,100	1,320	1,600	kHz
Maximum Duty Cycle	$D_{MAX}$		79	85	92	%

**N-Channel Switch**

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Current Limit	$I_{LIM}$		1.1	1.6	2.1	A
On-Resistance	$R_{ON}$	$I_{SW} = 1.2A$		0.28	0.50	$\Omega$
Leakage Current	$I_{SWOFF}$	$V_{SW} = 12V$		0.01	20.00	$\mu A$

**Control Inputs Characteristics**

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Input Low Voltage	$V_{IL}$				0.3 $V_{DD}$	V
Input High Voltage	$V_{IH}$		0.7 $V_{DD}$			V
Hysteresis	$V_{HYS}$			0.1 $V_{DD}$		V
SHDN Pull Up Current	$I_{PH}$			0.001	1.000	$\mu A$



Electrical Characteristics,  $V_{DD}=3.3V$ ,  $V_{DDH}=10V$

Soft Start & Fault Detect Time

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
Channel 1 Soft Start Time	$t_{SS1}$			14		ms
Channel 2 Soft Start Time	$t_{SS2}$			3.5		ms
Channel 3 Soft Start Time	$t_{SS3}$			3.5		ms
Channel 1 to Channel 2 Delay	$t_{D12}$	AAT1118A		7		ms
Channel 2 to Channel 3 Delay	$t_{D23}$	AAT1118B		10.5		ms
During Fault Protect Trigger Time	$t_{FP}$			83		ms
IN1 Fault Protection Voltage	$V_{F1}$		1.05	1.10	1.15	V
IN2 Fault Protection Voltage	$V_{F2}$		0.08	0.13	0.18	V
IN3 Fault Protection Voltage	$V_{F3}$		1.05	1.10	1.15	V




Electrical Characteristics,  $V_{DD} = 3.3V$ ,  $V_{DDH} = 10V$

Charge Pump Regulator Characteristics

PARAMETER	SYMBOL	TEST CONDITION	MIN	TYP	MAX	UNIT
$V_{DD1}$ Input Supply Range	$V_{DD1}$		6		15	V
$V_{DD2}$ Input Supply Range	$V_{DD2}$		6		15	V
IN2 Threshold Voltage	IN2		-50	0	50	mV
IN3 Threshold Voltage	IN3		1.20	1.25	1.30	V
IN2 Input Bias Current	$I_{B2}$	$V_{IN2} = -0.05V$	-50		50	nA
IN3 Input Bias Current	$I_{B3}$	$V_{IN3} = -1.5V$	-50		50	nA
Charge Pump Frequency	$f_{OSCP}$		540	640	740	kHz
OUT2 Switch R-on	$R_{ONP2}$			3	20	$\Omega$
	$R_{ONN2}$			3	20	$\Omega$
OUT3 Switch R-on	$R_{ONP3}$			3	20	$\Omega$
	$R_{ONN3}$			3	20	$\Omega$
Continuous Output Current	$I_{OUT}$				30	mA




**BLOCK DIAGRAM**  
**AAT1118/A**

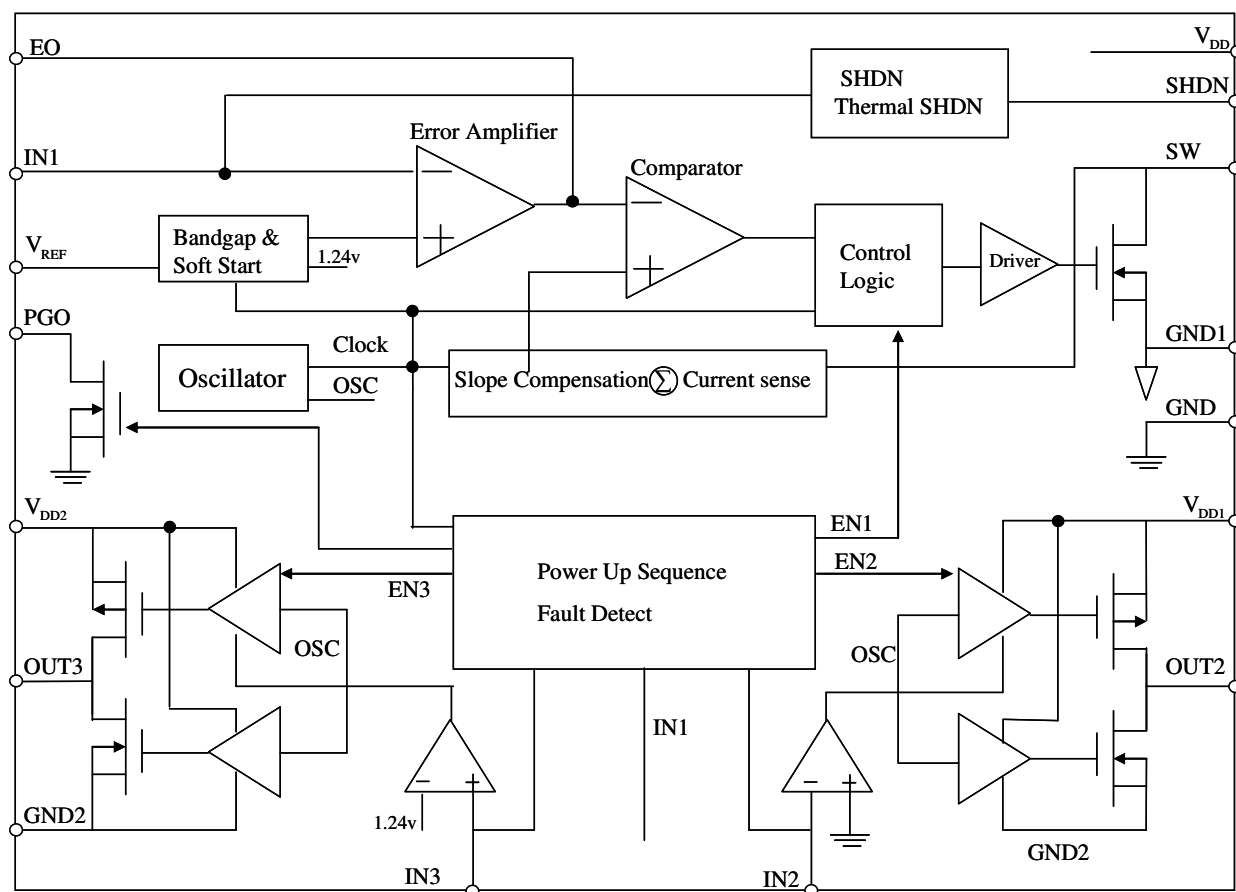











**BLOCK DIAGRAM**  
**AAT1118B**

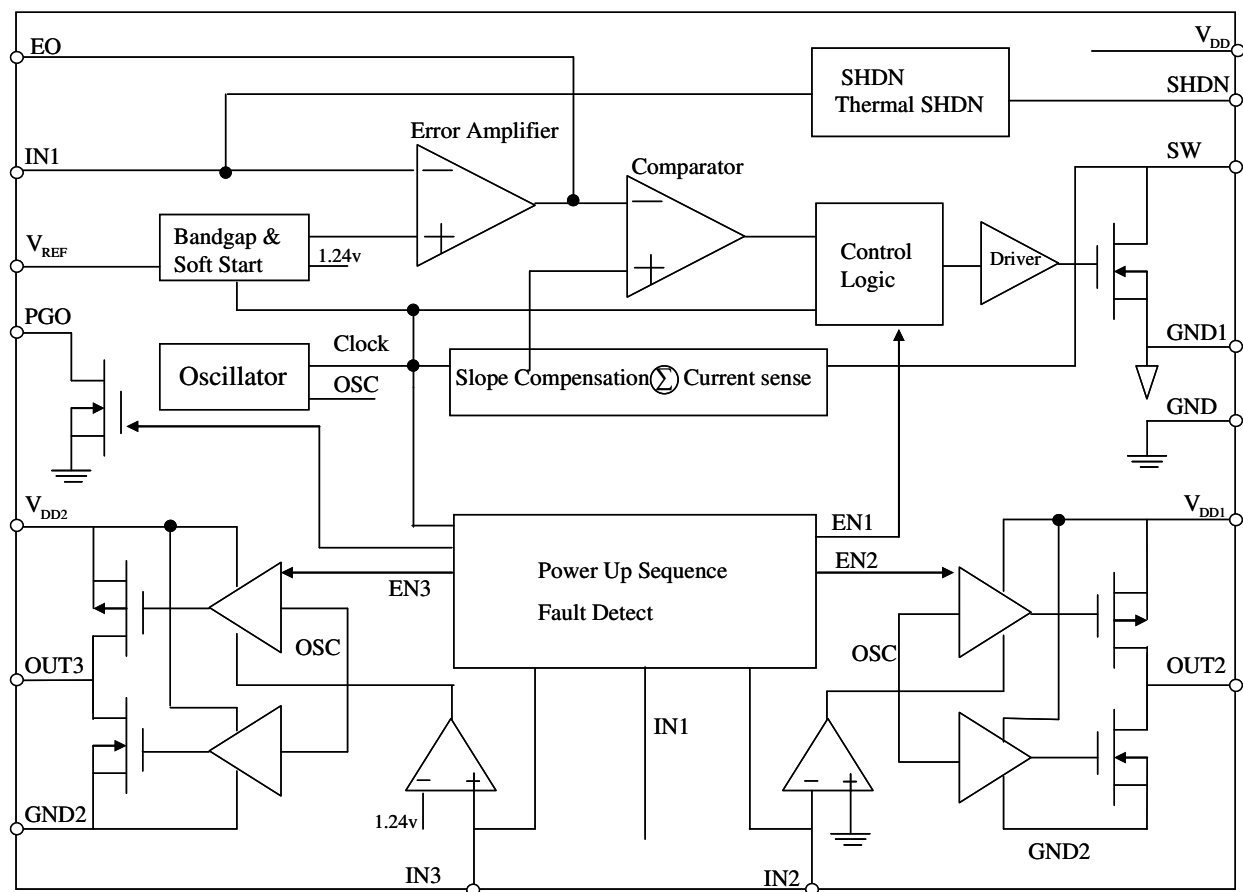







## Typical Operating Characteristics

(VIN = 3.3V, T<sub>C</sub> = +25°C, unless otherwise noted.)

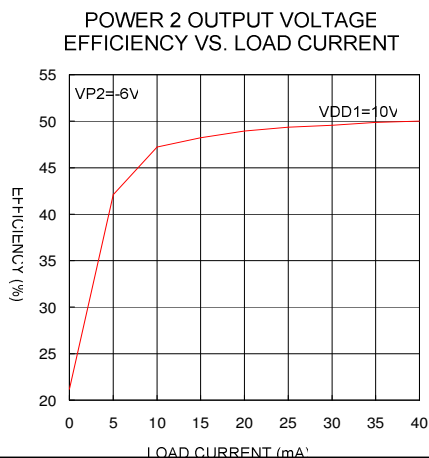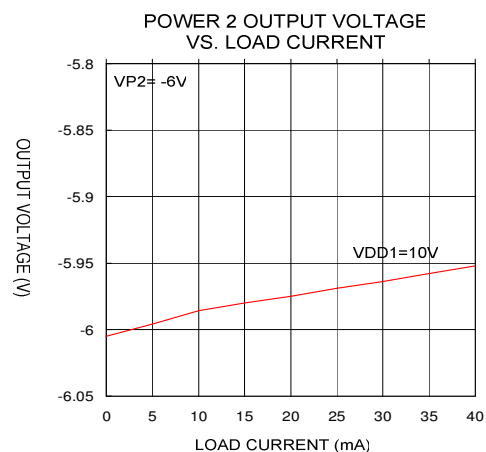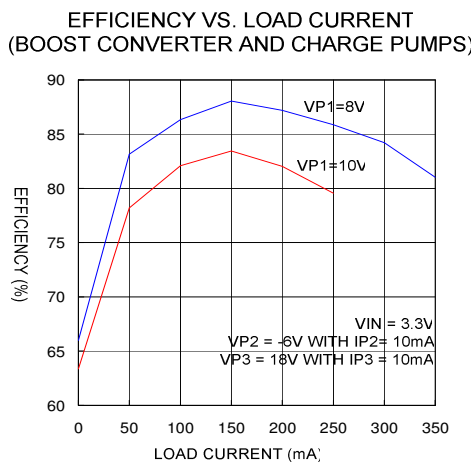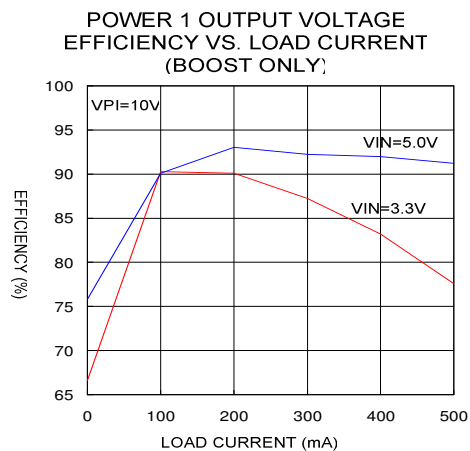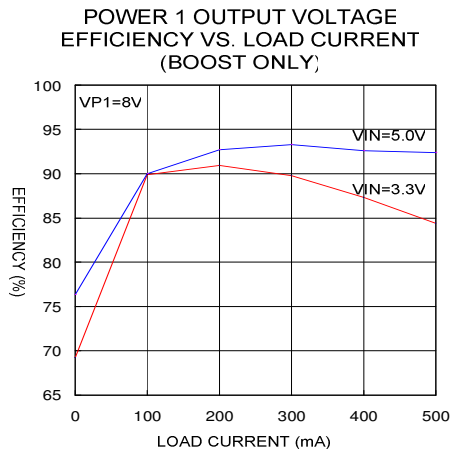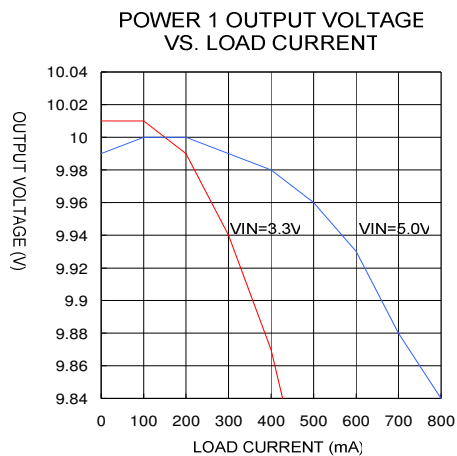




**Typical Operating Characteristics (Continued)**  
**(VIN = 3.3V, T<sub>C</sub> = +25°C, unless otherwise noted.)**

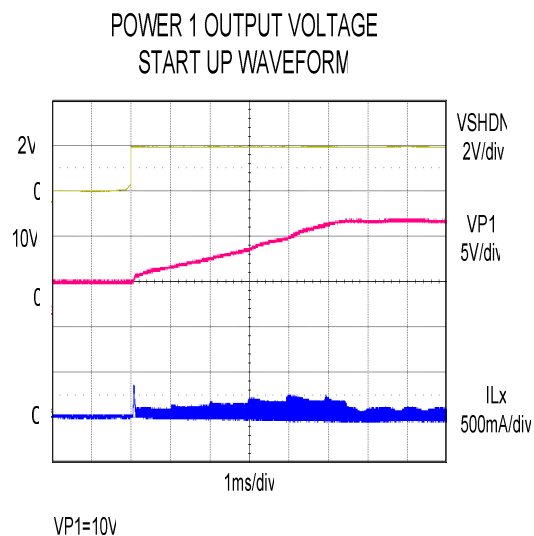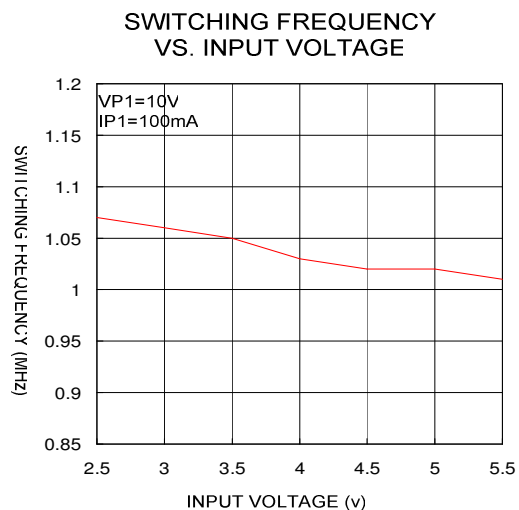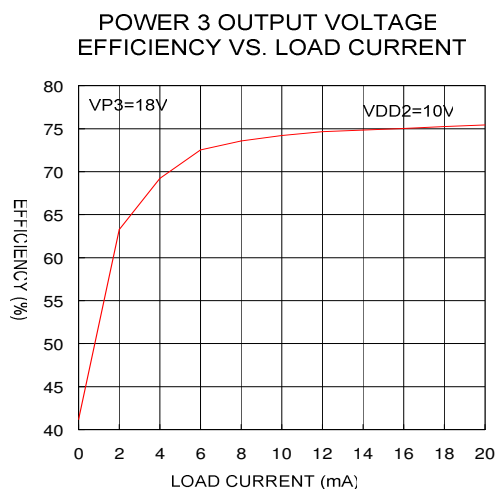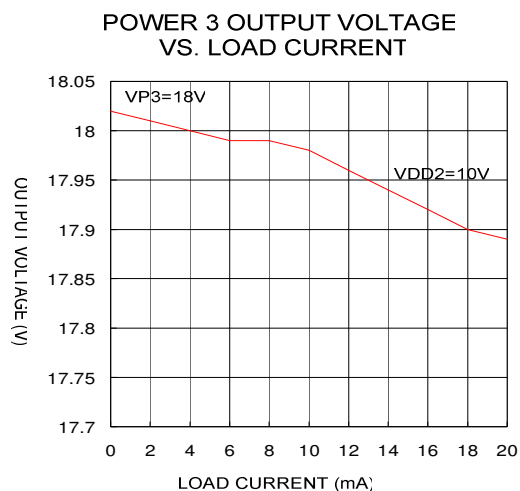




**Typical Operating Characteristics (Continued)**  
(VIN = 3.3V, T<sub>C</sub> = +25°C, unless otherwise noted.)

POWER 1 OUTPUT VOLTAGE  
WAVEFORM WITH LOAD

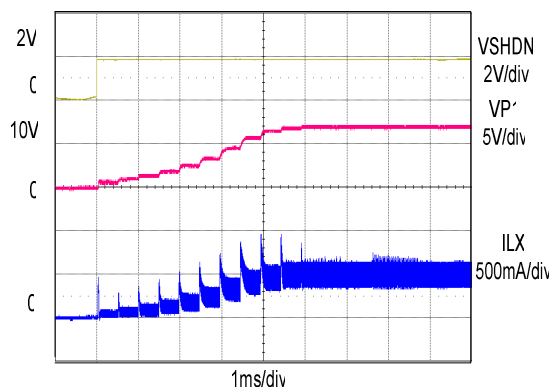


VP1=10V, IP1=200mA

POWER ON SEQUENCING  
AAT1118

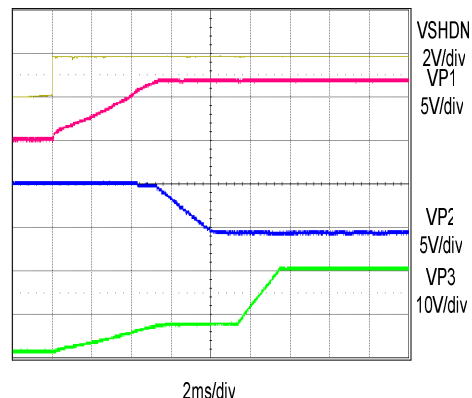


VP1=10V, VP2=6V, VP3=18V

OUTPUT RIPPLE WAVEFORM

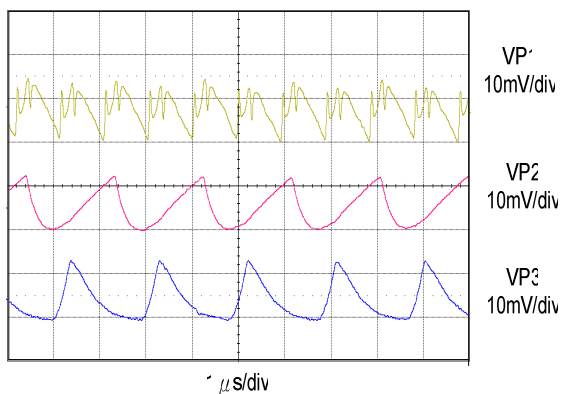


VP1=10V, IP1=200mA  
VP2=6V, IP2=10mA  
VP3=18V, IP3=10mA

LOAD TRANSIENT RESPONSE

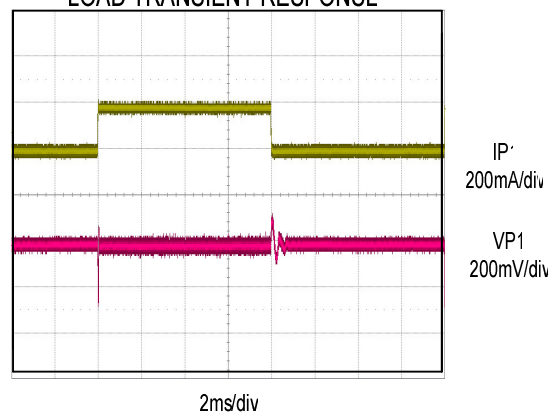

VIN=3.3V, VP1=10V  
IP1 (20mA TO 200mA)




# Application Circuit

## AAT1118/A






Application Circuit  
AAT1118B

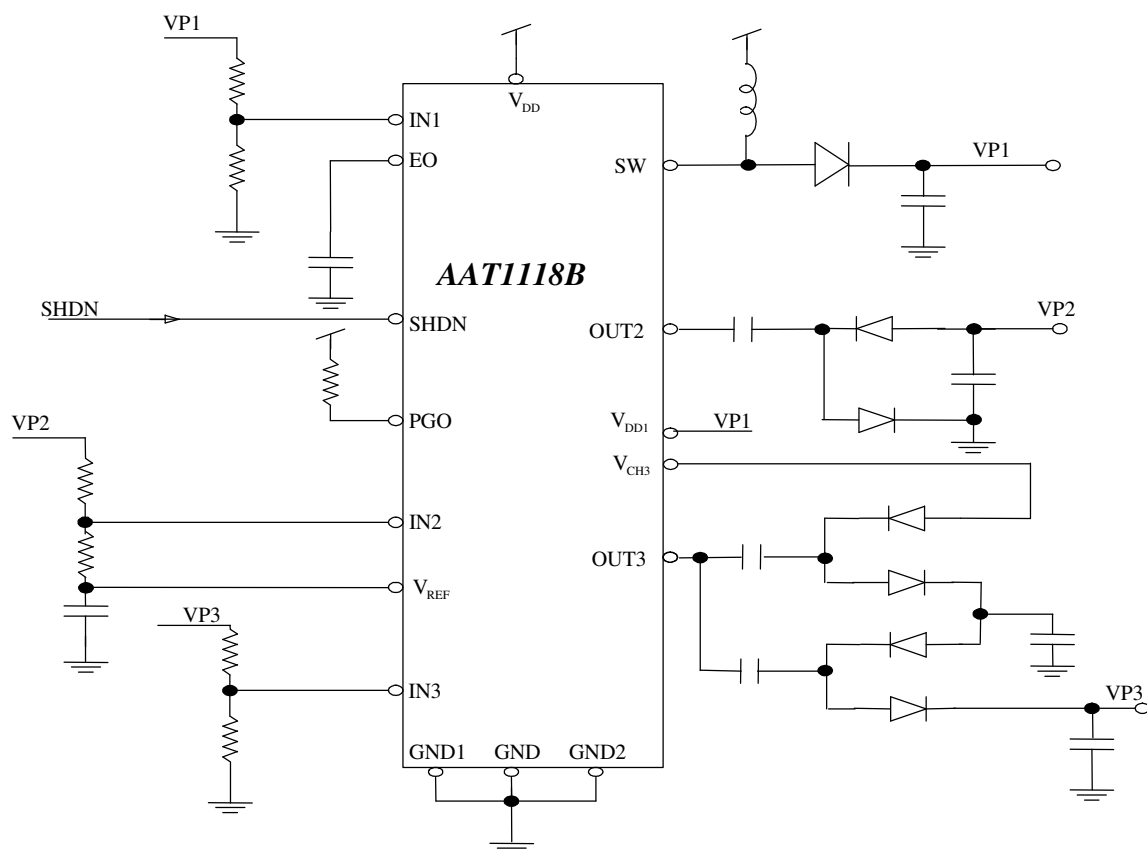




**Timing Chart**  
**AAT1118**

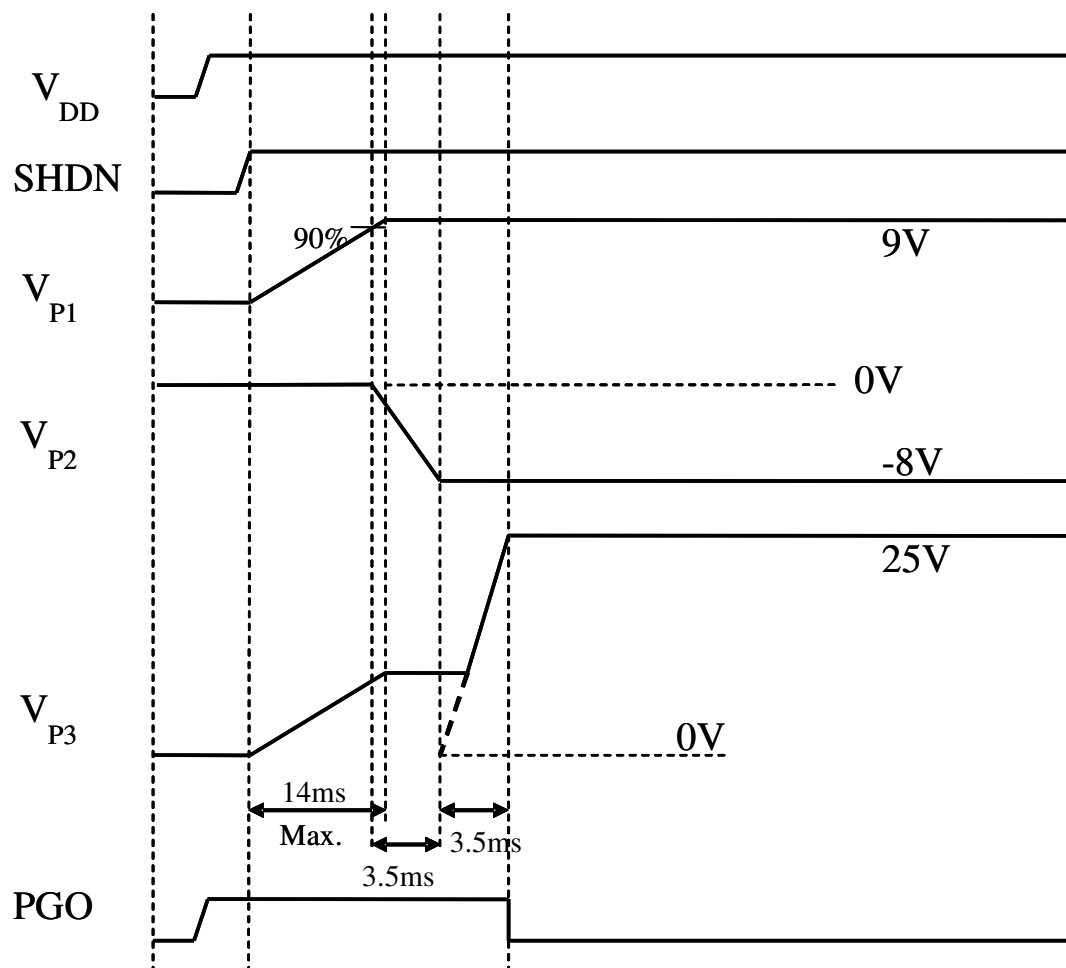




**Timing Chart**  
**AAT1118A**

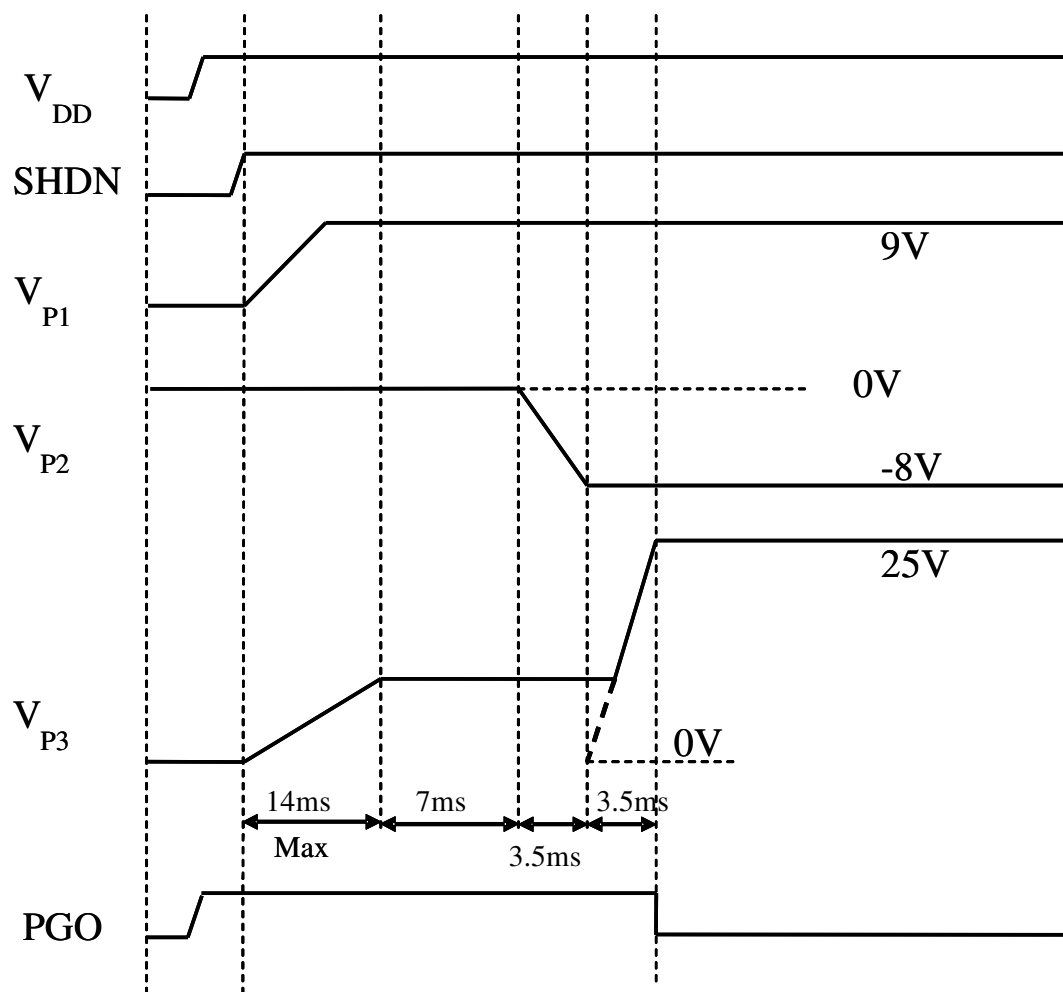









**Timing Chart**  
**AAT1118B**

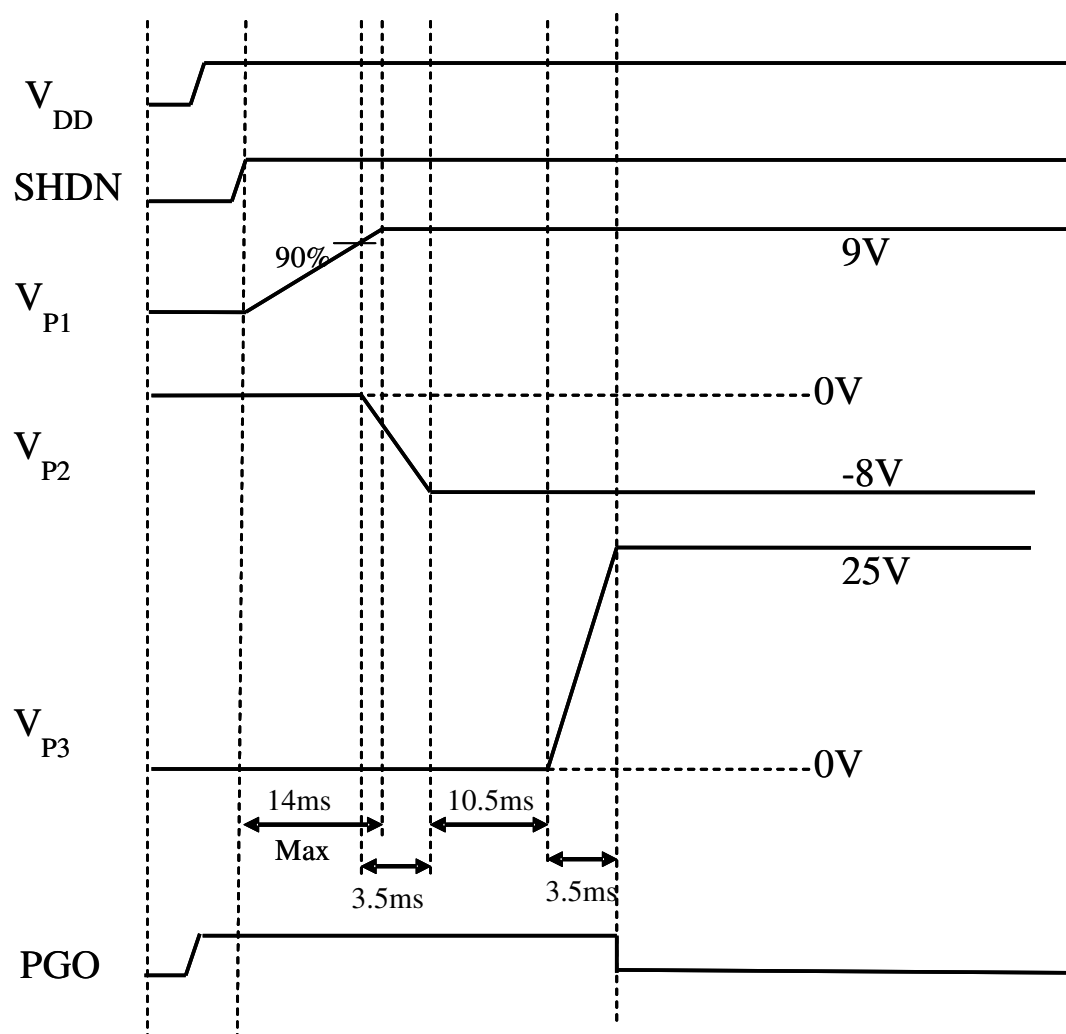



# Package Dimension

## 16-Pin TSSOP

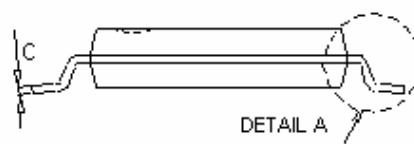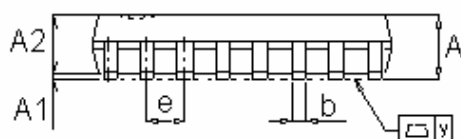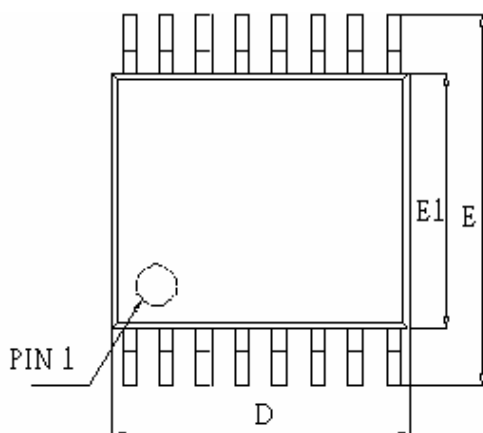

Symbol	Dimensions In Millimeters			Dimensions In Inches		
	Min	TYP	Max	Min	TYP	Max
A	1.05	1.10	1.20	0.041	0.043	0.047
A1	0.05	0.10	0.15	0.002	0.004	0.006
A2	-----	1.00	1.05	-----	0.039	0.041
b	0.20	0.25	0.28	0.008	0.010	0.011
C	-----	0.127	-----	-----	0.005	-----
D	4.900	5.075	5.100	0.1930	0.1998	0.2000
E	6.2	6.4	6.6	0.244	0.252	0.260
E1	4.3	4.4	4.5	0.170	0.173	0.177
e	-----	0.65	-----	-----	0.026	-----
L	0.5	0.6	0.7	0.020	0.024	0.028
y	-----	-----	0.076	-----	-----	0.003
$\theta$	0°	4°	8°	0°	4°	8°