

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

1N846 THRU 1N889

SILICON GENERAL PURPOSE DIODES

AXIAL LEAD GLASS CASE

DESCRIPTION

The CENTRAL SEMICONDUCTOR 1N846 series types are Silicon Diodes designed for general purpose medium current applications.


MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

		846	847	848	849	850	851	852	853	854	855	856	
		857	858	859	860	861	862	863	864	865	866	867	
		868	869	870	871	872	873	874	875	876	877	878	
	SYMBOL	879	880	881	882	883	884	885	886	887	888	889	UNIT
Peak Working Reverse Voltage	V_{RWM}	50	100	200	300	400	500	600	700	800	900	1000	V
RMS Voltage	V_{RMS}	35	70	140	210	280	350	420	490	560	630	700	V
Average Forward Current	I_O					200							mA
Peak Forward Surge Current	I_{FSM}					2.0							A
Power Dissipation	P_D					400							mW
Operating and Storage													
Junction Temperature	T_J, T_{stg}					-65 to +175							$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
I_R	$V_R=\text{Rated } V_{RMS}$		20	μA
I_R	$V_R=\text{Rated } V_{RWM}$		100	μA
V_F	$I_F=200\text{mA}$		1.0	V

OUTLINE DRAWING: (Similar to JEDEC DO-7)

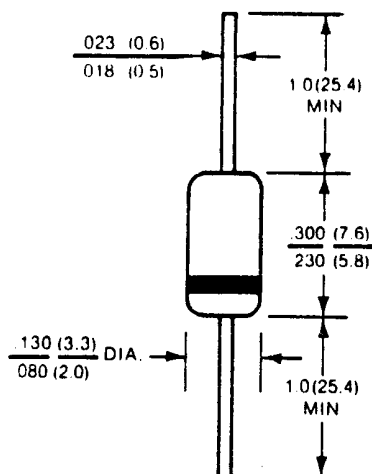

DIMENSIONS IN INCHES (MILLIMETERS)