


Plug-In

Power Splitter/Combiner

4 Way-0° 50Ω

1 to 500 MHz

PSC-4-1W+
PSC-4-1W



CASE STYLE: A01

PRICE: \$43.20 ea. QTY (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The + suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	0.5W max.
Internal Dissipation	0.250W max.

Pin Connections

SUM PORT	4
PORT 1	7
PORT 2	8
PORT 3	1
PORT 4	2
GROUND	3,5,6
CASE GROUND	3,5,6

Features

- low insertion loss, 0.5 dB typ.
- good isolation, 27 dB typ.
- rugged welded construction

Applications


- VHF/UHF
- defense and federal communication

Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 6 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f _L -f _U	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
1-500	29	20	27	18	25	18	0.4	0.8	0.5	1.0	0.8	1.5	1	3	5	0.2	0.3	0.5

L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Outline Drawing



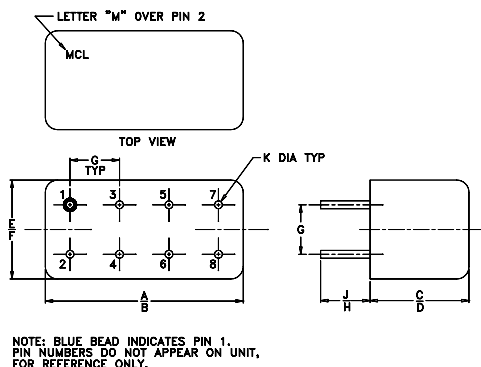


Outline Dimensions (inch/mm)


A	B	C	D	E	F
.770	.800	.385	.400	.370	.400
19.56	20.32	9.78	10.16	9.40	10.16
G	H	J	K		wt
.200	.20	.14	.031		grams
5.08	5.08	3.56	0.79		5.2

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR				
	S-1	S-2	S-3	S-4		1-2	1-3	3-4		S	1	2	3	4
1.00	6.53	6.53	6.52	6.52	0.01	28.07	59.70	27.99	0.11	1.16	1.24	1.24	1.24	1.24
5.00	6.40	6.40	6.40	6.40	0.01	30.23	56.95	29.79	0.04	1.08	1.14	1.14	1.14	1.14
10.00	6.40	6.40	6.40	6.40	0.01	30.18	53.42	29.74	0.05	1.07	1.13	1.13	1.13	1.14
60.00	6.47	6.47	6.47	6.48	0.01	28.89	40.36	28.52	0.32	1.06	1.12	1.12	1.12	1.12
110.00	6.51	6.51	6.51	6.52	0.01	27.62	35.81	27.33	0.59	1.06	1.11	1.11	1.11	1.11
140.00	6.51	6.53	6.53	6.55	0.03	26.97	34.13	26.68	0.74	1.06	1.10	1.10	1.10	1.10
190.00	6.54	6.55	6.56	6.60	0.05	26.20	32.10	25.89	0.83	1.06	1.09	1.09	1.09	1.09
230.00	6.57	6.58	6.59	6.63	0.06	25.97	31.10	25.61	0.97	1.07	1.09	1.08	1.08	1.09
290.00	6.60	6.60	6.64	6.69	0.10	26.33	30.29	25.93	1.12	1.08	1.11	1.09	1.10	1.09
340.00	6.63	6.63	6.67	6.76	0.13	27.67	30.45	27.18	1.12	1.11	1.14	1.12	1.12	1.12
400.00	6.67	6.70	6.74	6.86	0.18	31.45	31.73	30.57	1.07	1.18	1.18	1.16	1.16	1.15
430.00	6.72	6.77	6.81	6.92	0.19	35.41	32.98	33.83	1.04	1.23	1.21	1.18	1.19	1.18
460.00	6.77	6.82	6.85	6.98	0.21	44.77	35.04	39.06	0.88	1.29	1.23	1.21	1.21	1.20
480.00	6.80	6.84	6.89	7.02	0.22	46.86	37.10	40.39	0.77	1.33	1.25	1.22	1.23	1.22
500.00	6.87	6.91	6.94	7.09	0.22	37.58	40.54	36.30	0.82	1.38	1.26	1.24	1.24	1.23

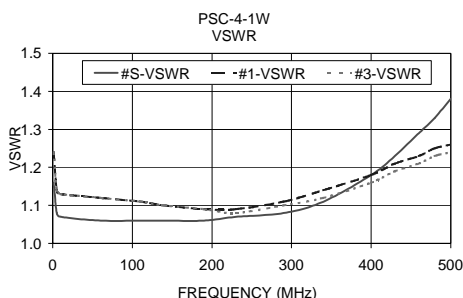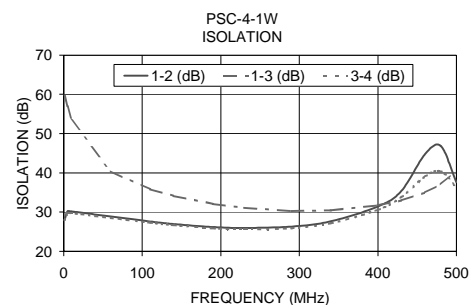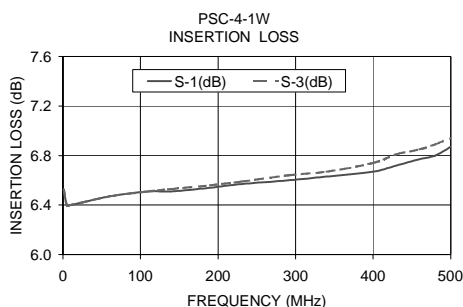

electrical schematic



Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. A
M98898
PSC-4-1W
HY/TD/CP
060711