


Plug-In

Power Splitter/Combiner

4 Way-0° 75Ω

30 to 600 MHz

PSC-4A-1W-75+
PSC-4A-1W-75



CASE STYLE: C07
PRICE: \$56.45 ea. QTY (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The + suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.250W max.

Pin Connections

SUM PORT	2
PORT 1	8
PORT 2	12
PORT 3	5
PORT 4	9
GROUND	1,3,4,6,7,10,11,13,14,15,16
CASE GROUND	1,3,4,6,7,10,11,13,14,15,16

Features

- wideband, 30 to 600 MHz
- low insertion loss, 0.8 dB typ.
- rugged welded construction

Applications

- VHF/UHF
- instrumentation

Splitter Electrical Specifications


FREQ. RANGE (MHz)	ISOLATION (dB)				INSERTION LOSS (dB) ABOVE 6 dB				PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)	
	L		U		L		U		L	U	L	U
f_L - f_U	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Min.	Typ. Max.	Typ. Max.	Typ. Max.	Typ. Max.	Max.	Max.	Max.	Max.
30-600	27	20	22	18	0.6	0.8	0.8	1.1	2	5	0.2	0.5

L = low range [f_L to 10 f_L] U = upper range [$f_U/2$ to f_U]
Max. VSWR input (Sum Port) 1.5:1, Output, 1.3:1

Typical Performance Data




Freq. (MHz)	Insertion Loss (dB)				Amp. Unbal. (dB)	Isolation (dB)			Phase Unbal. (deg.)	VSWR				
	S-1	S-2	S-3	S-4		1-2	2-3	3-4		S	1	2	3	4
30.00	6.53	6.53	6.53	6.53	0.01	25.90	26.80	25.73	0.16	1.15	1.19	1.19	1.20	1.20
50.00	6.53	6.52	6.53	6.52	0.00	27.93	28.82	27.83	0.14	1.13	1.16	1.16	1.17	1.17
80.00	6.54	6.53	6.54	6.54	0.01	29.45	30.37	29.24	0.10	1.12	1.15	1.15	1.16	1.16
110.00	6.53	6.54	6.55	6.54	0.02	30.21	31.28	29.97	0.24	1.12	1.15	1.15	1.15	1.15
140.00	6.55	6.55	6.57	6.58	0.03	30.67	31.94	30.31	0.27	1.13	1.15	1.15	1.15	1.15
170.00	6.56	6.57	6.59	6.57	0.03	30.87	32.40	30.42	0.23	1.14	1.16	1.15	1.15	1.15
200.00	6.56	6.55	6.60	6.58	0.05	31.03	32.84	30.40	0.33	1.15	1.16	1.16	1.16	1.15
230.00	6.60	6.59	6.65	6.62	0.06	30.96	33.29	30.29	0.29	1.16	1.16	1.16	1.16	1.15
260.00	6.58	6.58	6.64	6.60	0.06	30.78	33.83	29.97	0.35	1.17	1.17	1.16	1.16	1.15
290.00	6.59	6.58	6.66	6.60	0.08	30.51	34.32	29.56	0.38	1.18	1.17	1.17	1.16	1.16
340.00	6.62	6.59	6.71	6.63	0.11	29.77	35.43	28.73	0.48	1.19	1.18	1.17	1.17	1.15
400.00	6.65	6.61	6.76	6.65	0.15	28.67	37.24	27.49	0.54	1.20	1.19	1.18	1.17	1.15
460.00	6.66	6.60	6.80	6.67	0.20	27.40	39.65	26.23	0.59	1.19	1.20	1.19	1.17	1.15
510.00	6.68	6.61	6.84	6.69	0.23	26.42	42.38	25.25	0.70	1.18	1.20	1.19	1.16	1.15
600.00	6.72	6.64	6.92	6.72	0.29	24.97	44.44	23.79	1.00	1.14	1.21	1.20	1.16	1.14

Outline Drawing

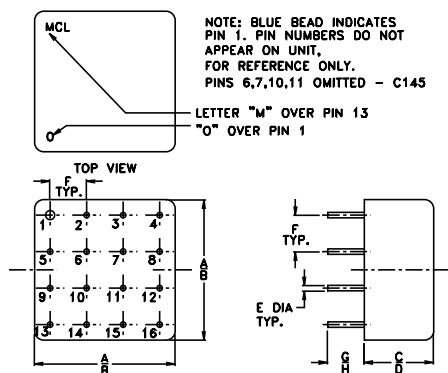


Outline Dimensions (inch)

A	B	C	D	E
.770	.810	.380	.410	.030
19.56	20.57	9.65	10.41	0.76
F	G	H		wt
.200	.20	.14		grams
5.08	5.08	3.56		11.0

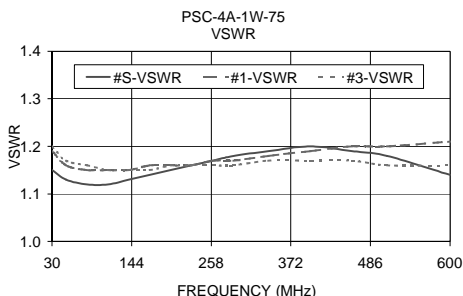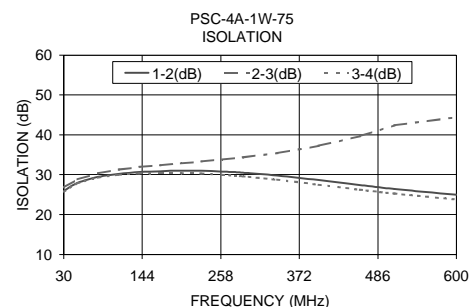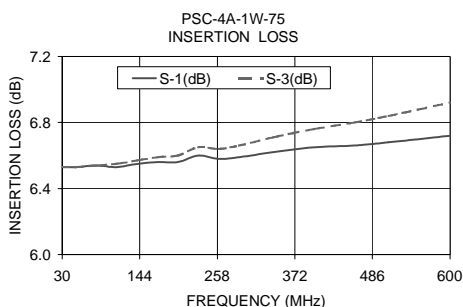

electrical schematic



Mini-Circuits®

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

REV. A
M98898
PSC-4A-1W-75
HY/TD/CP
060711