

Plug-In

Power Splitter/Combiner

5 Way-0° 50Ω

1 to 300 MHz

PSC-5-1+
PSC-5-1



CASE STYLE: C07

PRICE: \$68.95 ea. QTY (1-9)

+ RoHS compliant in accordance
with EU Directive (2002/95/EC)

The + suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	1W max.
Internal Dissipation	0.5W max.

Pin Connections

SUM PORT	1
PORT 1	4
PORT 2	8
PORT 3	12
PORT 4	16
PORT 5	15
GROUND	2,5,7,11,13,14
CASE GROUND	2,5,7,11,13,14
NOTUSED	3,6,9,10

Features

- low insertion loss, 0.6 dB typ.
- good isolation, 23 dB typ.
- rugged, welded case

Applications



- UHF
- instrumentation
- signal processing

Splitter Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)						INSERTION LOSS (dB) ABOVE 7.0 dB						PHASE UNBALANCE (Degrees)			AMPLITUDE UNBALANCE (dB)		
	L		M		U		L		M		U		L	M	U	L	M	U
	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Max.	Max.	Max.	Max.	Max.	Max.
f _L -f _U	25	20	23	18	20	17	0.2	0.5	0.6	1.0	1.5	2.0	2	4	8	0.2	0.3	0.6
1-300	25	20	23	18	20	17	0.2	0.5	0.6	1.0	1.5	2.0	2	4	8	0.2	0.3	0.6

L = low range [f_L to 10 f_L] M = mid range [10 f_L to $f_U/2$] U = upper range [$f_U/2$ to f_U]

Outline Drawing


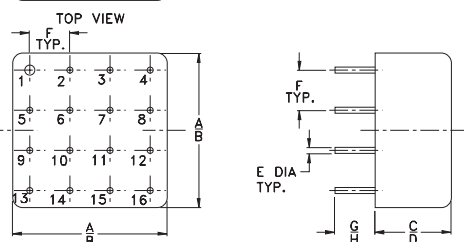
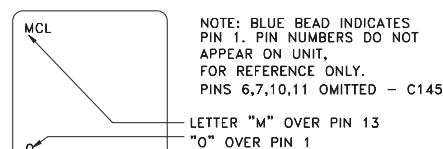


Outline Dimensions (inch)


A	B	C	D	E
.770	.810	.380	.410	.030
19.56	20.57	9.65	10.41	0.76
F	G	H	wt	
.200	.20	.14	grams	
5.08	5.08	3.56	11.0	

Typical Performance Data

Freq. (MHz)	Insertion Loss (dB)					Amp. Unbal. (dB)	Isolation (dB)				Phase Unbal. (deg.)	VSWR S	VSWR OUTPUTS
	S-1	S-2	S-3	S-4	S-5		1-2	2-3	3-4	2-5			
1.00	7.29	7.31	7.40	7.39	7.36	0.11	52.12	42.15	45.77	26.71	0.16	1.12	1.22
5.00	7.21	7.23	7.32	7.30	7.27	0.11	45.47	49.28	44.56	30.29	0.06	1.09	1.10
10.00	7.21	7.24	7.32	7.31	7.28	0.11	43.00	44.84	42.73	30.28	0.12	1.09	1.09
20.00	7.25	7.27	7.35	7.34	7.31	0.10	39.16	40.15	38.78	29.90	0.34	1.11	1.09
30.00	7.26	7.28	7.36	7.35	7.33	0.10	36.36	37.20	35.83	29.48	0.58	1.14	1.08
50.00	7.36	7.37	7.45	7.44	7.42	0.09	32.53	33.29	31.94	28.57	0.96	1.21	1.08
70.00	7.38	7.39	7.45	7.44	7.44	0.07	29.99	30.72	29.40	27.64	1.32	1.29	1.09
90.00	7.48	7.48	7.53	7.52	7.53	0.05	28.13	28.87	27.51	26.73	1.67	1.38	1.09
110.00	7.57	7.57	7.60	7.59	7.62	0.05	26.73	27.44	26.11	25.91	1.97	1.46	1.09
140.00	7.67	7.67	7.68	7.69	7.72	0.05	25.18	25.88	24.55	24.88	2.27	1.55	1.08
170.00	7.73	7.73	7.71	7.73	7.79	0.08	24.10	24.85	23.44	24.07	2.73	1.63	1.09
200.00	7.88	7.88	7.85	7.86	7.94	0.09	23.49	24.26	22.80	23.57	3.03	1.70	1.08
230.00	7.78	7.80	7.75	7.78	7.87	0.12	23.27	24.06	22.52	23.39	3.33	1.66	1.06
260.00	8.00	8.03	7.96	8.00	8.14	0.18	23.55	24.38	22.66	23.67	3.69	1.57	1.07
300.00	7.79	7.83	7.76	7.81	7.99	0.23	24.87	26.03	23.61	25.29	4.34	1.36	1.06

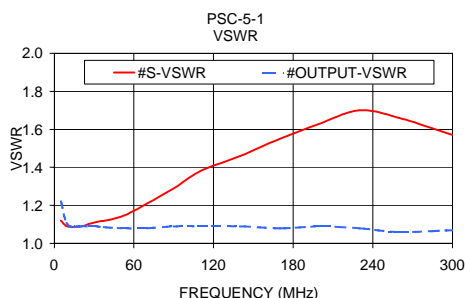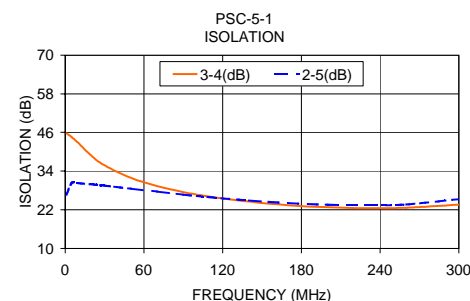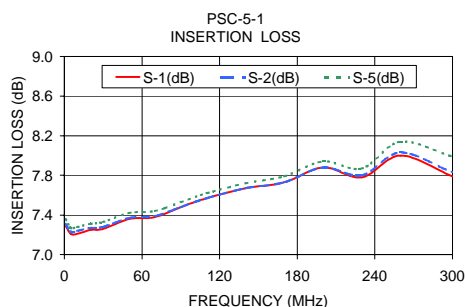

electrical schematic



Mini-Circuits

INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

REV. A
M98898
PSC-5-1
HY/TD/CP/AM
060803