



# NATIONAL HYBRID, INC.

2200 Smithtown Avenue, Ronkonkoma, NY 11779  
(516) 981-2400 FAX 516-981-8888

## Mil-Std-1553 Products NHI-1523 Series +12V Dual Transceivers

### Features/Applications:

- Very Low Standby Power
- Low Thermal Resistance
- Totally Isolated Channels
- Short Circuit Proof
- Superior Noise Performance

### Description:

The NHI +12V dual transceivers are available in 1.900" x .780", 36 pin plug-in and flatpack packages.

Each receiver converts the 1553 bus bi-phase data to complementary RX and RX\_L TTL digital outputs for use by the manchester decoder. The device provides independent receiver enables for each channel. Devices are available with receiver outputs normally HIGH or LOW during standby mode for compatibility with industry standard decoders.

The transmitters will output bi-phase manchester to the coupling transformer when the TX and TX\_L inputs are driven by complementary TTL digital data. The device provides an independent transmitter inhibit TXINH for each channel.

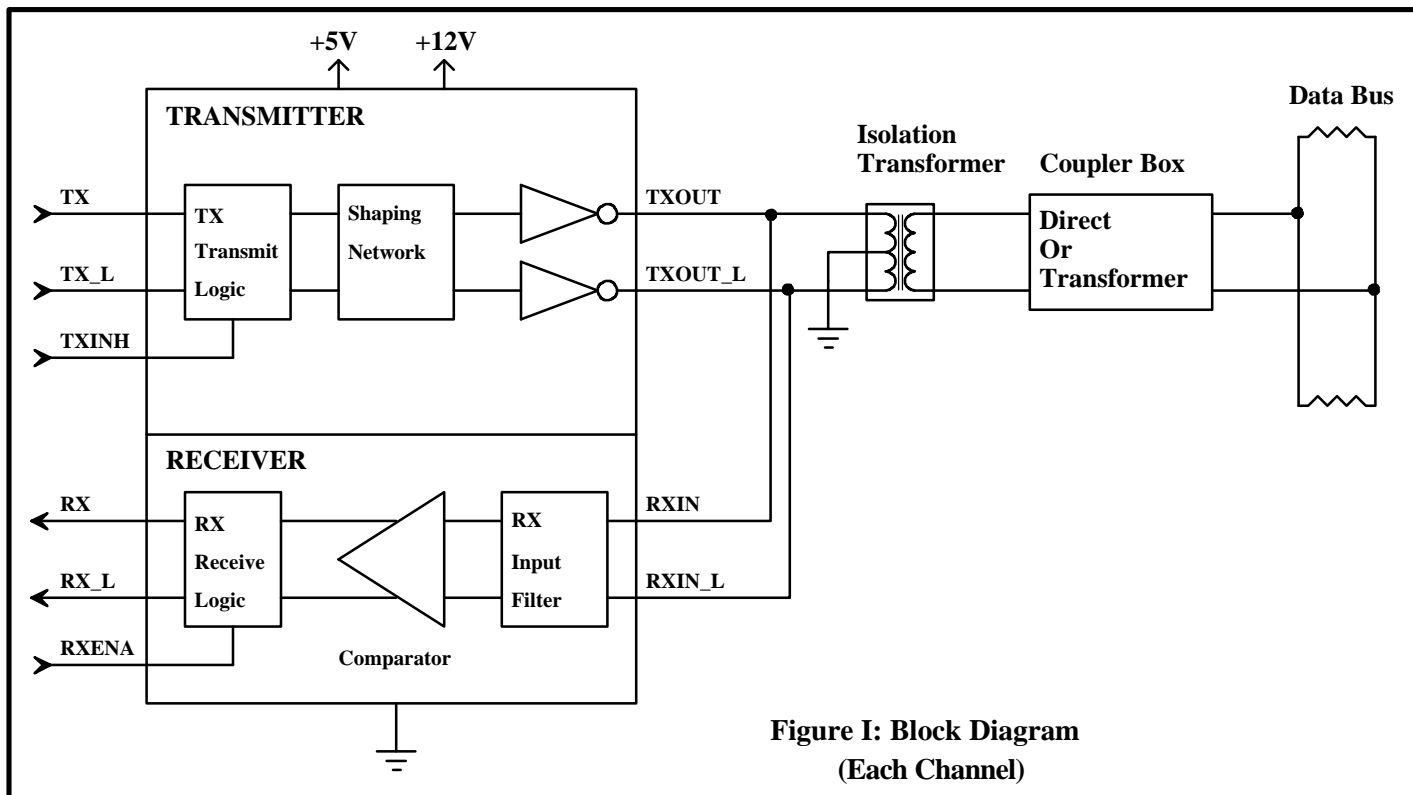


Figure I: Block Diagram  
(Each Channel)

# NHI-1523

**TABLE I: Electrical Specifications**

Parameter	Condition	Symbol	Min	Typ	Max	Units
POWER SUPPLY REQUIREMENTS		V <sub>cc</sub>	4.5		5.5	V
		+V	11.4		12.6	V
V <sub>cc</sub> SUPPLY CURRENT	V <sub>cc</sub> =5.0V, +V=12.0V, total hybrid	I <sub>cc</sub>			25	mA
+V SUPPLY CURRENT	V <sub>cc</sub> =5.0V, +V=12.0V, each channel, not transmitting	+I			25	mA
	V <sub>cc</sub> =5.0V, +V=12.0V, One channel @ 100% duty cycle	+I <sub>100%</sub>			210	mA
POWER DISSIPATION	V <sub>cc</sub> =5.0V, +V=12.0V, Transmit one channel @ 100% duty cycle	Pd2			0.96	W
OPERATING TEMPERATURES	Junction	T <sub>j</sub>	-55		160	°C
	Case	T <sub>c</sub>	-55		125	°C
	Storage	T <sub>s</sub>	-65		150	°C
THERMAL IMPEDANCE	Junction to Case	θ <sub>jc</sub>			8.8	°C/W

## LOGIC I/O

RXENA_A, TXA, TXA_L, TXINH_A, RXENA_B, TXB, TXB_L, TXINH_B	V <sub>cc</sub> = 5.5V, Vil= 0.0V	Iil			-0.8	mA
	V <sub>cc</sub> = 4.5V, Vih= 2.7V	Iih			40	uA
RXA, RXA_L, RXB, RXB_L	V <sub>cc</sub> = 5.5V, Iol= -8 mA	Vol			0.5	V
	V <sub>cc</sub> = 4.5V, Ioh= 400 uA	Voh	2.5			V

## RECEIVER

Input Resistance	1 MHz sine wave	Rin	7			k Ω
Input Capacitance	1 MHz sine wave	Cin			5	pF
Common Mode Rejection Ratio		CMRR	40			dB
Threshold Voltage	Differential	Vth	0.56		1.0	Vpp
Input Level	Differential	Vin	40			Vpp
Receiver Delay	Zero Crossing on bus to RX or RX_L	t <sub>RD</sub>			400	nS

## TRANSMITTER

Output Voltage	Across 35 W load TXVOC = +V = 12.0V	V <sub>OUT</sub>	6		9	Vpp
Rise/Fall Time	10% to 90% of peak to peak output	t <sub>R</sub> , t <sub>F</sub>	100	150	300	nS
Transmitter Delay	TX or TX_L edge to bus zero crossing	t <sub>TD</sub>			250	nS
Output Dynamic Offset Voltage	Across 35 W load	Vdyn	-90		90	mV
Output Noise	Differential	Vnpp			10	mVpp
Output Resistance	Differential, not transmitting	Rout	10			kΩ

# NHI-1523

## 36 Pin Package Functions

Pin#	Function	Pin#	Function
1	TXOUT_A	36	TXA_L
2	TXOUT_A_L	35	TXA
3	GND_A	34	TXINH_A
4	NC	33	+5V_A
5	RXA	32	NC
6	RXENA_A	31	NC
7	GND_A	30	RXIN_A_L
8	RXA_L	29	RXIN_A
9	NC	28	+12V_A
10	TXOUT_B	27	TXB_L
11	TXOUT_B_L	26	TXB
12	GND_B	25	TXINH_B
13	NC	24	+5V_B
14	RXB	23	NC
15	RXENA_B	22	NC
16	GND_B	21	RXIN_B_L
17	RXB_L	20	RXIN_B
18	NC	19	+12V_B

## Transformer Requirements:

The NHI-1523 requires a transformer with a turns ratio of 1.25:1.00 for Direct Coupling, and a turns ratio of 1.66:1.00 for Transformer Coupling to the Mil-Std-1553 Bus. Technitrol part number Q1553-3 or equivalent is recommended. The center tap on the transceiver side of the isolation transformer must be grounded.



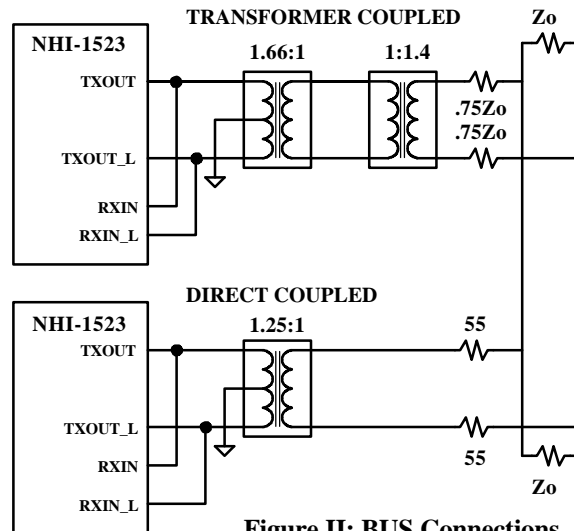


Figure II: BUS Connections

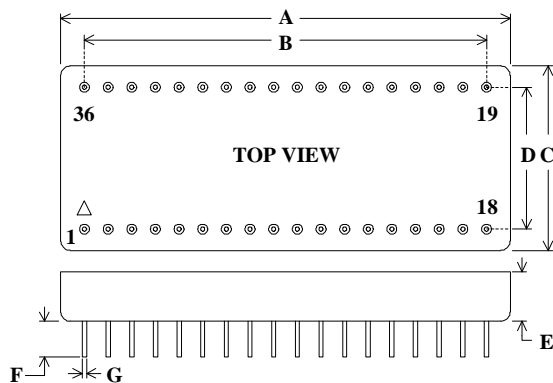

36 Pin Plug-In Package Detail

DIM	TYP (inches)	TOL (+/- inches)
A	1.900 SQ	0.010
B	17 EQ SP @	0.100 = 1.700
C	0.780	0.010
D	0.600	0.010
E	0.185	0.010
F	0.250	MIN
G	0.018	0.002

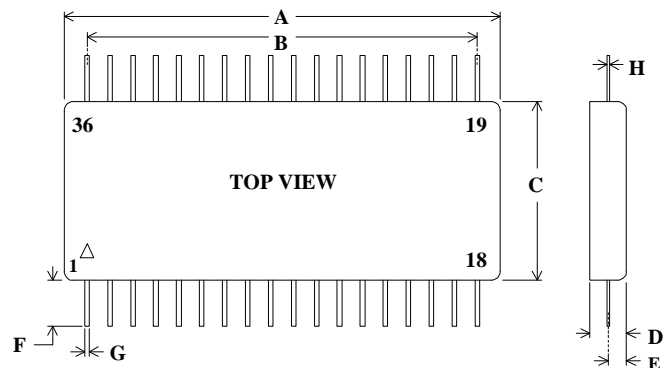


36 Pin Flatpack Package Detail

DIM	TYP (inches)	TOL (+/- inches)
A	1.900 SQ	0.010
B	17 EQ SP @	0.100 = 1.700
C	0.780	0.010
D	0.185	0.012
E	0.080	0.010
F	0.500	MIN
G	0.018	0.002
H	0.010	0.002

# NHI-1523


## Transmit Waveforms

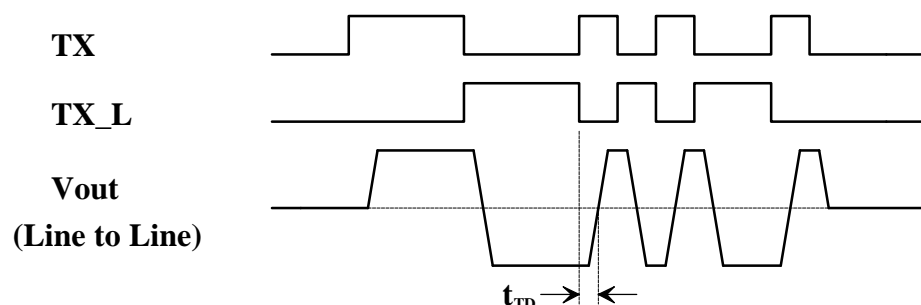

## Transmitter Operation:

A high level input on TXINH will inhibit the transmitter outputs. If the TX & TX\_L transmitter inputs are both high or both low, the transmitter is also inhibited.

## Receive Waveforms

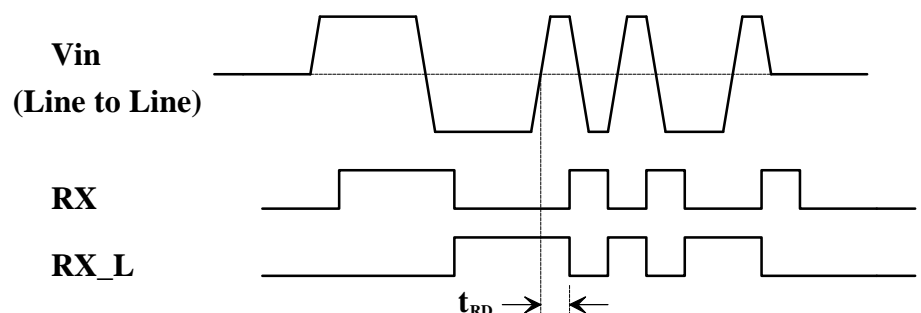

## Receiver Operation:

A low level input on RXENA will disable the receiver outputs RX & RX\_L regardless of bus activity.

The receiver output compatibility may be specified as logic 0 or logic 1 when in standby mode.

\*\* See Ordering Information

## Ordering Information:

NHI-1523 FP / M

### Reliability Grade

883 = Fully Compliant with Mil-Std-883

M = Military, -55 to +125 °C

Blank = Industrial, -40 to +85 °C

### Package Style

Blank = Plug-In

FP = Flatpack

### Decoder Compatibility

22 = RX & RX\_L, Standby = Logic 1

23 = RX & RX\_L, Standby = Logic 0

\*\* SMD Listing: DESC Drawing# 5962-89826

See QML-38534 for NHI's Manufacturer Qualification Under Mil-PRF-38534