


FEATURES

- Similar to TO-247AC (TO-3P) Case
- Low Forward Voltage Drop
- Low Power Loss, High Efficiency
- High Surge Current Capability
- 30 Volts and 100 Volts Types Available

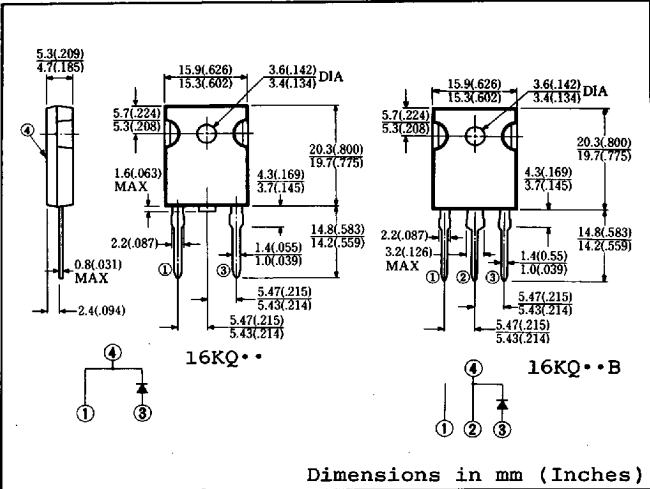

Approx. Net Weight: 5.5 Grams 5.55 Grams

MAXIMUM RATINGS

Voltage Rating	TYPE Symbol	◆ 16KQ30 ◆ 16KQ30B	16KQ40 16KQ40B	Unit	
Repetitive Peak Reverse Voltage	V _{RRM}	30	40	V	
Non-Repetitive Peak Reverse Voltage	V _{RSM}	35	45	V	
Electrical Rating	Symbol	Condition		Rating	Unit
Average Rectified Output Current	I _O	180° rectangular wave conduction T _C = 92°C		16.6	A
		180° sinusoidal wave conduction T _C = 100°C		15.0	
RMS Forward Current	I _{F(RMS)}			24	A
Peak One-cycle Forward Surge Current	I _{FSM}	50Hz half sine wave non-repetitive		250	A
Operating Junction Temperature Range	T _{jw}			-40 to 125	°C
Storage Temperature Range	T _{stg}			-40 to 125	°C
Mounting Torque	F _{tor}	Recommended torque		0.5 (5.1)	N•m (kgf•cm)

ELECTRICAL & THERMAL CHARACTERISTICS

Characteristics	Symbol	Test Condition		Max.	Unit
Peak Forward Voltage	V_{FM}	$I_{FM} = 15A$	$T_j = 25^{\circ}C$	0.56	V
Peak Reverse Current	I_{RM}	$V_{RM} = V_{RRM}$	$T_j = 25^{\circ}C$	15	mA
Thermal Resistance	$R_{th(j-c)}$	Junction to case		2	°C/W

◆ For spare parts only

FIG.1-FORWARD VOLTAGE
VS. FORWARD CURRENT

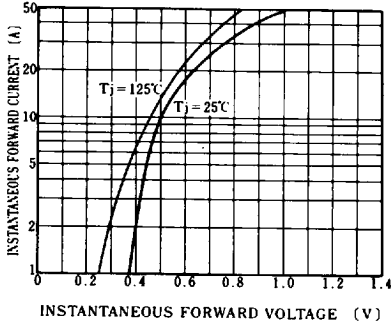


FIG.2-PEAK REVERSE CURRENT
VS. PEAK REVERSE VOLTAGE

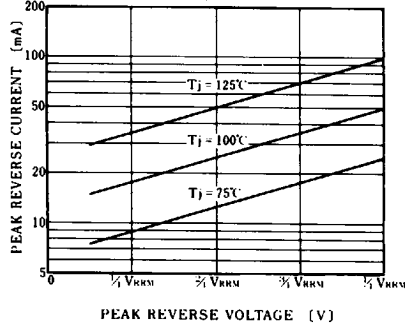


FIG.3-AVERAGE FORWARD CURRENT
VS. CASE TEMPERATURE


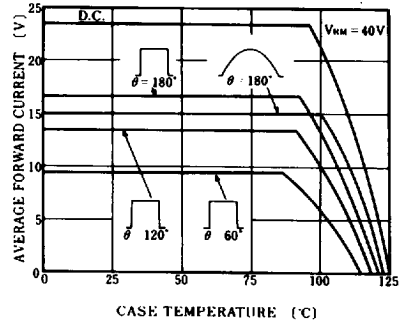


FIG.1-JUNCTION CAPACITANCE (TYPICAL)
VS. REVERSE VOLTAGE

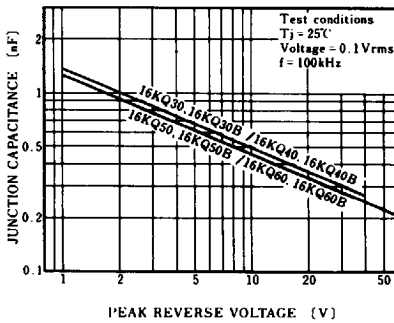

6615123 0001884 T77