



# SANKEN ELECTRIC COMPANY, LTD.

## S P E C I F I C A T I O N


SanKen Hybrid IC Voltage Regulator STR30000 Series

Date : December 2, 1986  
Specification No. : SSE-15051

### 1. Features:

- A. Hybrid IC Voltage Regulator incorporated triple diffused planar darlington transistor
- B. For Line-Operated CTV
- C. Fixed Output Voltage

### 2. Equivalent Circuit

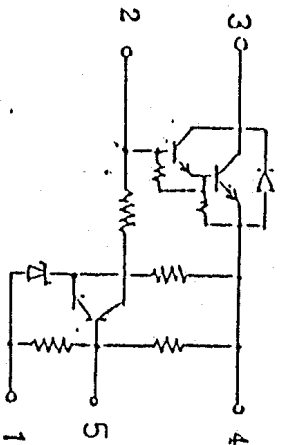

- 1. Common
- 2. Base
- 3. Input
- 4. Output
- 5. Blank

\* STR30110 has pin No.5  
for output voltage  
adjustment.

3. Outline Drawings, Marking and Pin connections are as per attached Fig.-1.

4. The type number, voltage and lot number shall be legitimately marked by white color.

### 5. Absolute Maximum Ratings

Description	Symbol	Unit	Ratings
Maximum Peak Input Voltage	$V_{IN}$	V	200
Maximum Output Current	$I_O$	A	1.0
Maximum Power Dissipation	$P_D$	W	27 ( $T_c=100^{\circ}C$ )
Operating Temperature	$T_{op}$	$^{\circ}C$	-20 ~ +125( $T_c$ )
Storage Temperature	$T_{stg}$	$^{\circ}C$	-30 ~ +125
Junction Temperature of Power Transistor	$T_j$	$^{\circ}C$	+150 Max

\*1. Recommended Case Temperature :  $T_c(op)=100^{\circ}C$



## SANKEN ELECTRIC COMPANY, LTD.

### 6. Electrical Characteristics $T_a = 25^{\circ}\text{C}$

Description	Conditions	Ratings
Fixed Output Voltage (Measuring Circuit 1 and 2)	See the Table	See the Table **
Line Regulation (Measuring Circuit 1)	"	"
Load Regulation (Measuring Circuit 1)	"	"
Output Voltage Temperature Coefficient	"	"
In-Out Saturation Voltage ( $V_{CE(sat)}$ )	$I_C = 1.0\text{A}$ , $I_B = 10\text{mA}$	1.5V Max
In-Out Breakdown Voltage ( $V_{CEO}$ )	$I_{CEO} = 10\text{mA}$ , $I_B = 0\text{A}$	200V Min
DC Current Gain ( $h_{FE}$ )	$I_C = 1.0\text{A}$ , $V_{CE} = 4\text{V}$	1,500 ~ 6,500
Thermal Resistance ( $R_{th(j-c)}$ )	Junction and Cupper plate of IC	1.8 $^{\circ}\text{C/W}$
In-Out Leak Current ( $I_{CEO}$ )	$V_{CE}$ (Pin 3-4)=200V Pin 1, 2 and 5 open	100 $\mu\text{A}$ Max
Reverse Surge Current Between Pin 4 and 2	$t = 65\text{msec}$	300mA Max




\*\* The fixed output voltage is to be measured at 5 seconds  
passed after power switch turned on.  
When the output voltage at the measuring circuit 1 is  
deviated from the specified, it is to be judged by the  
measuring circuit 2.

#### Suggested Silicone Grease

C746:	SHIN-ETSU CHEMICAL INDUSTRY CO., LTD.
C747:	SHIN-ETSU CHEMICAL INDUSTRY CO., LTD.
YG6260:	TOSHIBA SILICONE CO., LTD.
SC102:	TORAY SILICONE CO., LTD.

Table

Type No.		STR30110	STR30112	STR30113	STR30115	STR30120	STR30123	STR30125	STR30130	STR30134	STR30135
Description											
1	Specified Voltage	110±0.8V	112±0.8V	113±0.8V	115±0.8V	120±0.8V	123±0.8V	125±0.8V	130±0.8V	134±0.8V	135±0.8V
	Conditions 1 (Measuring Circuit 2)	I <sub>IN</sub> = 5.9 mA				I <sub>IN</sub> = 7.2 mA			I <sub>IN</sub> = 6.9 mA		
	Conditions 2 (Measuring Circuit 1)	V <sub>IN</sub> = 134 V(DC), I <sub>o</sub> = 0.5 A				V <sub>IN</sub> = 161 V(DC), I <sub>o</sub> = 0.5 A					
2	Specified Regulation	Δ 2.4 V max									
	Conditions (Measuring Circuit 1)	V <sub>IN</sub> = 125 ~ 150 V(DC) I <sub>o</sub> = 0.5 A				V <sub>IN</sub> = 145 ~ 170 V(DC) I <sub>o</sub> = 0.5 A			V <sub>IN</sub> = 150 ~ 175 V(DC) I <sub>o</sub> = 0.5 A		
3	Specified Regulation	Δ 0.5 V max									
	Conditions (Measuring Circuit 1)	V <sub>IN</sub> = 134 V(DC) I <sub>o</sub> = 0.25 ~ 0.5 A				V <sub>IN</sub> = 161 V(DC) I <sub>o</sub> = 0.25 ~ 0.5 A					
4	Specified Coefficient	± 0 mV/℃ typ									
	Conditions (Measuring Circuit 1)	V <sub>IN</sub> = 134 V(DC), I <sub>o</sub> = 0.5 A I <sub>o</sub> = -20 ~ 100 ℃				V <sub>IN</sub> = 161 V(DC), I <sub>o</sub> = 0.5 A T <sub>c</sub> = -20 ~ 100 ℃					
Value of resistors used in Measuring Circuit 1		R <sub>3</sub> = 10 KΩ R <sub>4</sub> = 220 KΩ			R <sub>3</sub> = 10 KΩ R <sub>4</sub> = 330 KΩ		R <sub>3</sub> = 12 KΩ R <sub>4</sub> = 220 KΩ		R <sub>3</sub> = 12 KΩ R <sub>4</sub> = 330 KΩ		

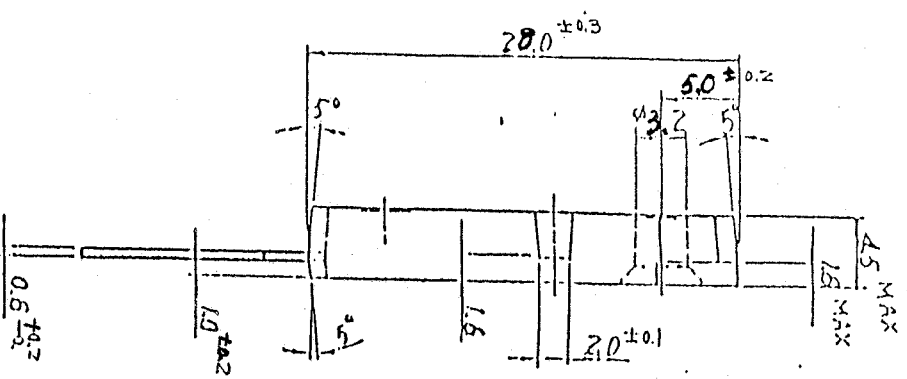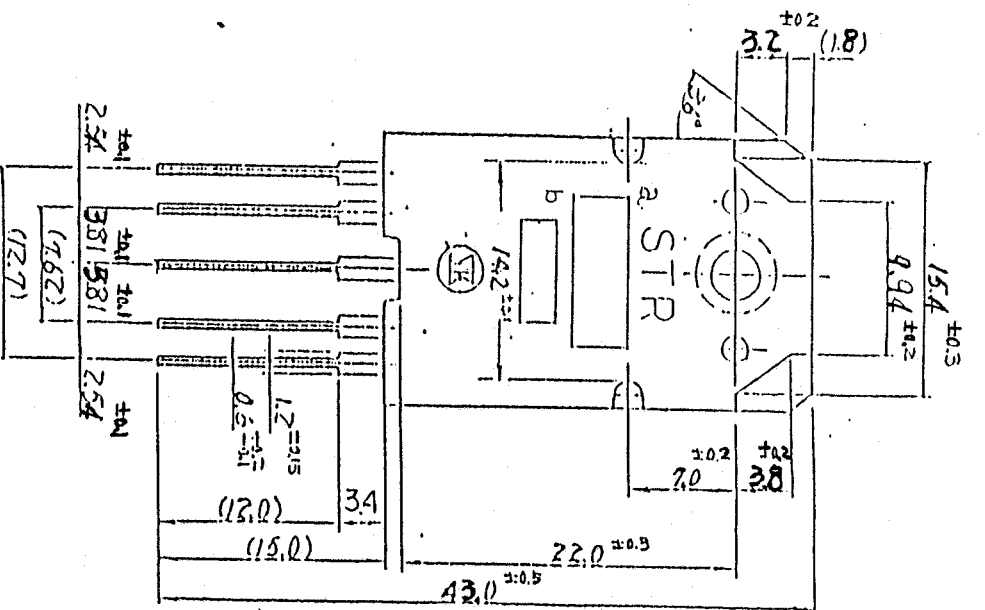

1. Common (Ground)
  2. Base Drive
  3. Input
  4. Output
  5. Blank
- \* STR30110 has pin No.5 for output voltage adjustment.

a. Type number  
b. Lot number

```

1st character for year
2nd character for month
Jan ~ Sept: 1 ~ 9
October : 0
November : N
December : D
3rd and 4th characters
for date : 01 ~ 31

```

4	4	.	4	4	4	Outline Drawings for Plastic Molded STR (2GR)
3	3	.	3	3		
2	2	.	2	2		
1	1	.	1	1		
0	0	.	0	0		