



# 74ACT8244

## RELAY DRIVER IC

- OPERATES 4 LATCHING RELAIS, 1 SINGLE SIDE STABLE RELAY AND 1 LED
- VERY LOW POWER CONSUMPTION
- TTL COMPATIBLE INPUT THRESHOLDS
- IMPROVED LATCH-UP IMMUNITY UP TO 300mA
- TSSOP-20 PACKAGE

### DESCRIPTION

The device is a relais driver for line card application. It is able to operate four latching relays, one single side stable relay and one LED connected either to GND or VCC. All the outputs can be set to LOW with the RST input as shown in the true table.




**T**  
(TSSOP Package)

**ORDER CODES :**  
74ACT8244TTR

### PIN DESCRIPTION

PIN No	SYMBOL	NAME AND FUNCTION
1	RST	Master Reset
2	IN1A	Input of 1st latched relay drv
3	IN1B	Input of 1st latched relay drv
4	IN2A	Input of 2nd latched relay drv
5	IN2B	Input of 2nd latched relay drv
6	IN3A	Input of 3rd latched relay drv
7	IN3B	Input of 3rd latched relay drv
8	IN4	Input of 1st relay driver
9	IN5	Input LED driver
10	GND	Ground
11	NC	Not Connected
12	OUT5	Output of LED driver
13	OUT4	Output of 1st relay driver
14	OU3B	Output 3rd latched relay drv
15	OU3A	Output 3rd latched relay drv
16	OU2B	Output 2nd latched relay drv
17	OU2A	Output 2nd latched relay drv
18	OU1B	Output 1st latched relay drv
19	OU1A	Output 1st latched relay drv
20	V <sub>CC</sub>	Supply Voltage

### LOGIC DIAGRAM

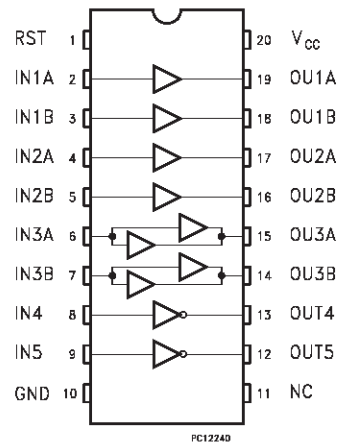

## ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
$V_{CC}$	Supply Voltage	-0.5 to +7	V
$V_I$	DC Input Voltage	-0.5 to $V_{CC} + 0.5$	V
$V_O$	DC Output Voltage	-0.5 to $V_{CC} + 0.5$	V
$I_{IK}$	DC Input Diode Current	$\pm 50$	mA
$I_{OK}$	DC Output Diode Current	$\pm 50$	mA
$I_O$	DC Output Current	$\pm 100$	mA
$I_{CC}$ or $I_{GND}$	DC $V_{CC}$ or Ground Current	$\pm 400$	mA
$T_{stg}$	Storage Temperature	-65 to +150	°C

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.

## RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
$V_{CC}$	Supply Voltage	4.75 to 5.25	V
$V_I$	Input Voltage	0 to $V_{CC}$	V
$V_O$	Output Voltage	0 to $V_{CC}$	V
$T_{op}$	Operating Temperature:	-30 to +80	°C
dt/dv	Input Rise and Fall Time $V_{CC} = 4.5$ to 5.5V (note1)	10	ns/V

1)  $V_{IN}$  from 0.8V to 2.0V

## DC SPECIFICATIONS (Electrical characteristics over recommended operating conditions)

Symbol	Parameter	Test Conditions	Value			Unit
			Min.	Typ.	Max.	
$V_{IH}$	High Level Input Threshold	$V_O = 0.1\text{ V}$ or $V_{CC} - 0.1\text{ V}$	2.0	1.4		V
$V_{IL}$	Low Level Input Threshold	$V_O = 0.1\text{ V}$ or $V_{CC} - 0.1\text{ V}$		1.4	0.8	V
$V_{OH}$	High Level Output Voltage for Single Driver	$I_{OUT} = -35\text{ mA}$	$V_{CC} - 0.68$	$V_{CC} - 0.3$		V
$V_{OL}$	Low Level Output Voltage for Single Driver	$I_{OUT} = 35\text{ mA}$		0.25	0.68	V
$V_{OH}$	High Level Output Voltage for Double Relay Driver	$I_{OUT} = -70\text{ mA}$	$V_{CC} - 0.68$	$V_{CC} - 0.3$		V
$V_{OL}$	Low Level Output Voltage for Double Relay Driver	$I_{OUT} = 70\text{ mA}$		0.25	0.68	V
$V_{OH}$	High Level Output Voltage for Single Side Relay or LED	$I_{OUT} = -50\text{ mA}$	$V_{CC} - 0.8$	$V_{CC} - 0.4$		V
$V_{OL}$	Low Level Output Voltage for Single Side Relay or LED	$I_{OUT} = 50\text{ mA}$		0.3	0.8	V
$I_I$	Input Leakage Current	$V_I = V_{CC}$ or GND			$\pm 1$	$\mu\text{A}$
$I_{CCT}$	Max $I_{CC}$ /Input	$V_I = V_{CC} - 2.1\text{ V}$		0.6	1.5	mA
$I_{CC}$	Quiescent Supply Current	$V_I = V_{CC}$ or GND		4	40	$\mu\text{A}$

AC ELECTRICAL CHARACTERISTICS (C<sub>L</sub> = 50 pF, R<sub>L</sub> = 500 Ω, Input t<sub>r</sub> = t<sub>f</sub> = 3 ns)

Symbol	Parameter	Test Condition	Value			Unit
			Min.	Typ.	Max.	
t <sub>PLH</sub> t <sub>PHL</sub>	Propagation Delay Time	Over recommended operating conditions		7.0	11.0	ns

TRUTH TABLE FOR LATCHING RELAY DRIVER

INPUT			OUTPUT		Condition
RST	INnA	INnB	OUnA	OUnB	
H	X	X	L	L	Storage
L	L	L	L	L	Storage
L	L	H	L	H	Operate
L	H	L	H	L	Release
L	H	H	H	H	Storage

Z = High Impedance  
X = Don't Care  
n = 1,2,3


TRUTH TABLE FOR SINGLE SIDE RELAY

INPUT	OUTPUT
IN4	OUT4
L	H
H	L


TRUTH TABLE FOR LED DRIVER

INPUT	OUTPUT
IN5	OUT5
L	H
H	L


OUTPUT CIRCUIT FOR LATCHING RELAY DRIVER

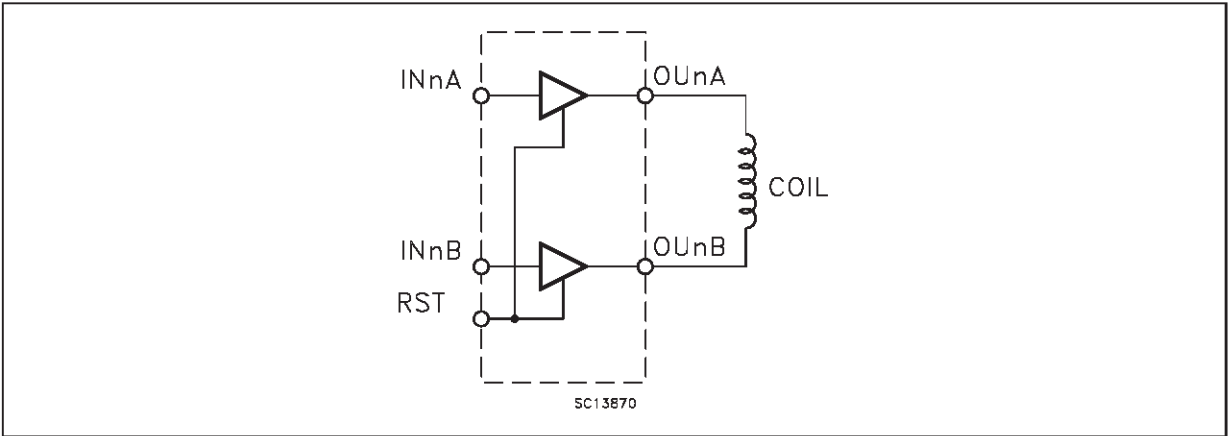


OUTPUT CIRCUIT FOR SINGLE SIDE RELAY

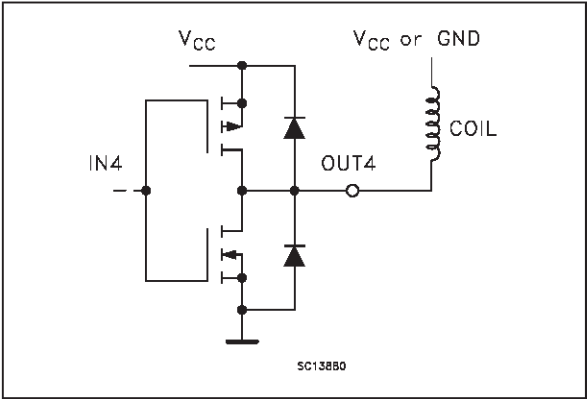


OUTPUT CIRCUIT FOR LED DRIVER

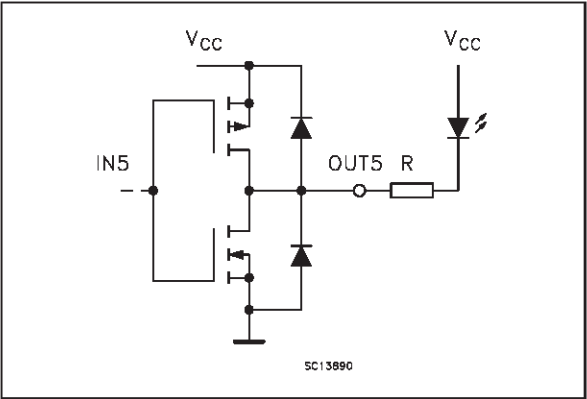


Output Characteristics of a Double Relay Driver N-channel with All Outputs Loaded

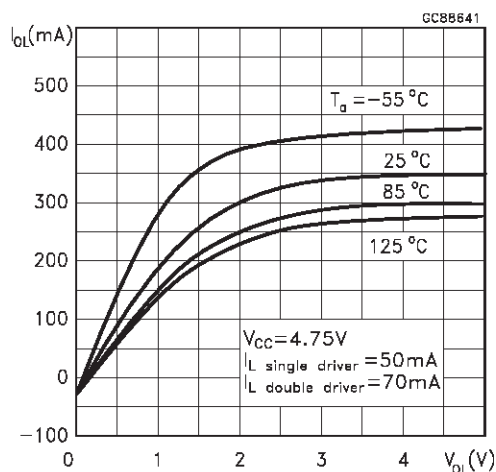


Output Characteristics of a Double Relay Driver P-channel with All Outputs Loaded

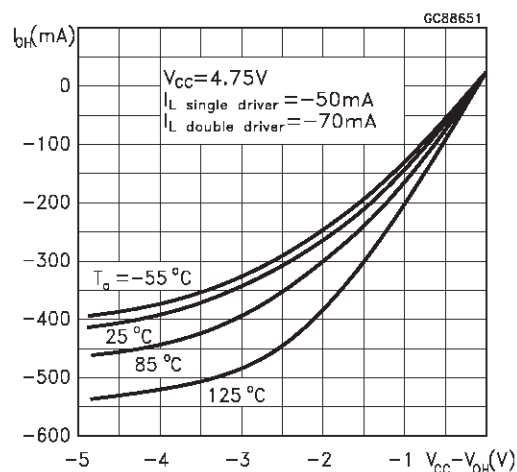

Output Characteristics of a Single Side Relay or Led Driver N-channel with All Outputs Loaded

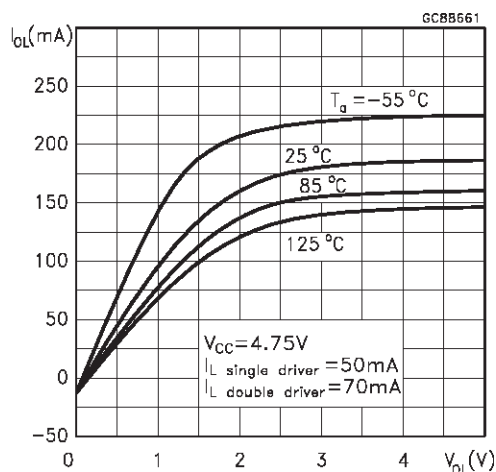


Output Characteristics of a Single Side Relay or Led Driver P-channel with All Outputs Loaded

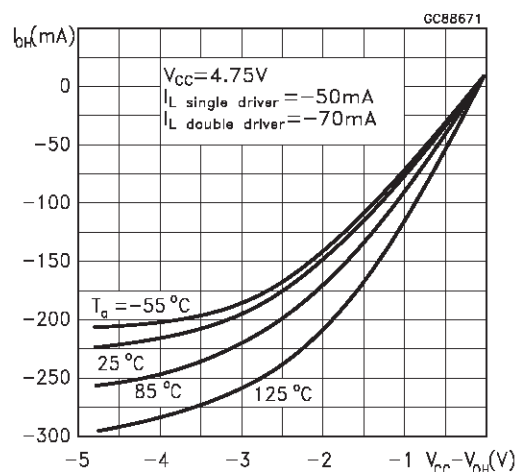

## TSSOP20 MECHANICAL DATA

DIM.	mm			inch		
	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.
A			1.1			0.433
A1	0.05	0.10	0.15	0.002	0.004	0.006
A2	0.85	0.9	0.95	0.335	0.354	0.374
b	0.19		0.30	0.0075		0.0118
c	0.09		0.2	0.0035		0.0079
D	6.4	6.5	6.6	0.252	0.256	0.260
E	6.25	6.4	6.5	0.246	0.252	0.256
E1	4.3	4.4	4.48	0.169	0.173	0.176
e		0.65 BSC			0.0256 BSC	
K	0°	4°	8°	0°	4°	8°
L	0.50	0.60	0.70	0.020	0.024	0.028

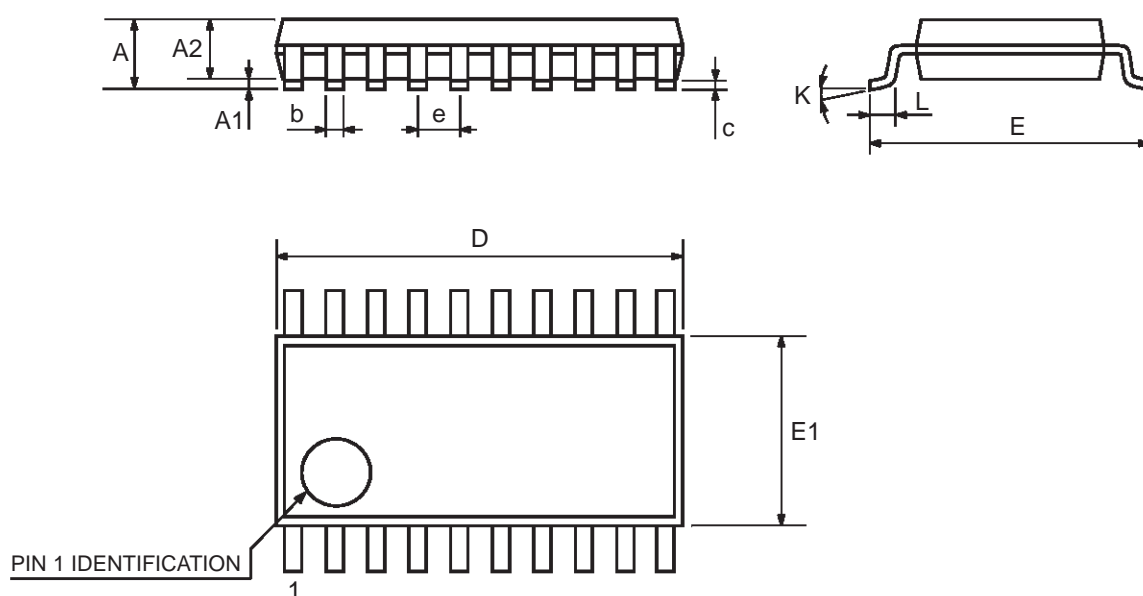

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specification mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 1999 STMicroelectronics – Printed in Italy – All Rights Reserved

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco  
Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>