


RF & MICROWAVE TRANSISTORS AVIONICS APPLICATIONS

- REFRACTORY/GOLD METALLIZATION
- EMITTER SITE BALLASTED
- LOW THERMAL RESISTANCE
- INPUT/OUTPUT MATCHING
- OVERLAY GEOMETRY
- METAL/CERAMIC HERMETIC PACKAGE
- $P_{OUT} = 90\text{ W MIN. WITH } 13\text{ dB GAIN}$
- BANDWIDTH 225 MHz

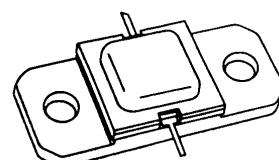

.400 x .400 2NLFL (S042)
hermetically sealed

ORDER CODE
AM0912-080

BRANDING
0912-80


DESCRIPTION

The AM0912-080 Avionics power transistor is a broadband, high peak pulse power device specifically designed for avionics applications requiring broad bandwidth with moderate duty cycle and pulse width constraints such as ground/ship based DME/TACAN.

This device is also designed for specialized applications including JTIDS where reduced power provided under pulse formats utilizing short pulse widths and high burst or overall duty cycles.

The AM0912-080 is housed in the unique AMPAC™ Hermetic Metal/Ceramic package with internal Input/Output matching structures.

PIN CONNECTION

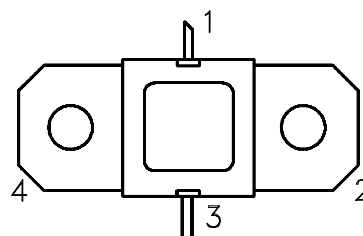

1. Collector 3. Emitter
2. Base 4. Base

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}\text{C}$)

Symbol	Parameter	Value	Unit
P_{DISS}	Power Dissipation* ($T_C \leq 100^{\circ}\text{C}$)	220	W
I_C	Device Current*	7.0	A
V_{CC}	Collector-Supply Voltage*	50	V
T_J	Junction Temperature (Pulsed RF Operation)	250	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	- 65 to +200	$^{\circ}\text{C}$

THERMAL DATA

$R_{TH(j-c)}$	Junction-Case Thermal Resistance*	0.80	$^{\circ}\text{C/W}$
---------------	-----------------------------------	------	----------------------

*Applies only to rated RF amplifier operation

AM0912-080

ELECTRICAL SPECIFICATIONS ($T_{case} = 25^{\circ}C$)

STATIC

Symbol	Test Conditions	Value			Unit
		Min.	Typ.	Max.	
BV_{CBO}	$I_C = 40mA$ $I_E = 0mA$	65	—	—	V
BV_{EBO}	$I_E = 10mA$ $I_C = 0mA$	3.0	—	—	V
BV_{CER}	$I_C = 40mA$ $R_{BE} = 10\Omega$	65	—	—	V
I_{CBO}	$V_{CB} = 50V$	—	—	12	mA
h_{FE}	$V_{CE} = 5V$ $I_C = 2A$	20	—	120	—


DYNAMIC

Symbol	Test Conditions	Value			Unit
		Min.	Typ.	Max.	
P_{OUT}	$f = 960 - 1215MHz$ $P_{IN} = 13W$ $V_{CC} = 50V$	90	100	—	W
η_C	$f = 960 - 1215MHz$ $P_{IN} = 13W$ $V_{CC} = 50V$	38	44	—	%
G_P	$f = 960 - 1215MHz$ $P_{IN} = 13W$ $V_{CC} = 50V$	8.4	—	—	dB

Note: Pulse Width = $10\mu Sec$


Duty Cycle = 10%

TEST CIRCUIT

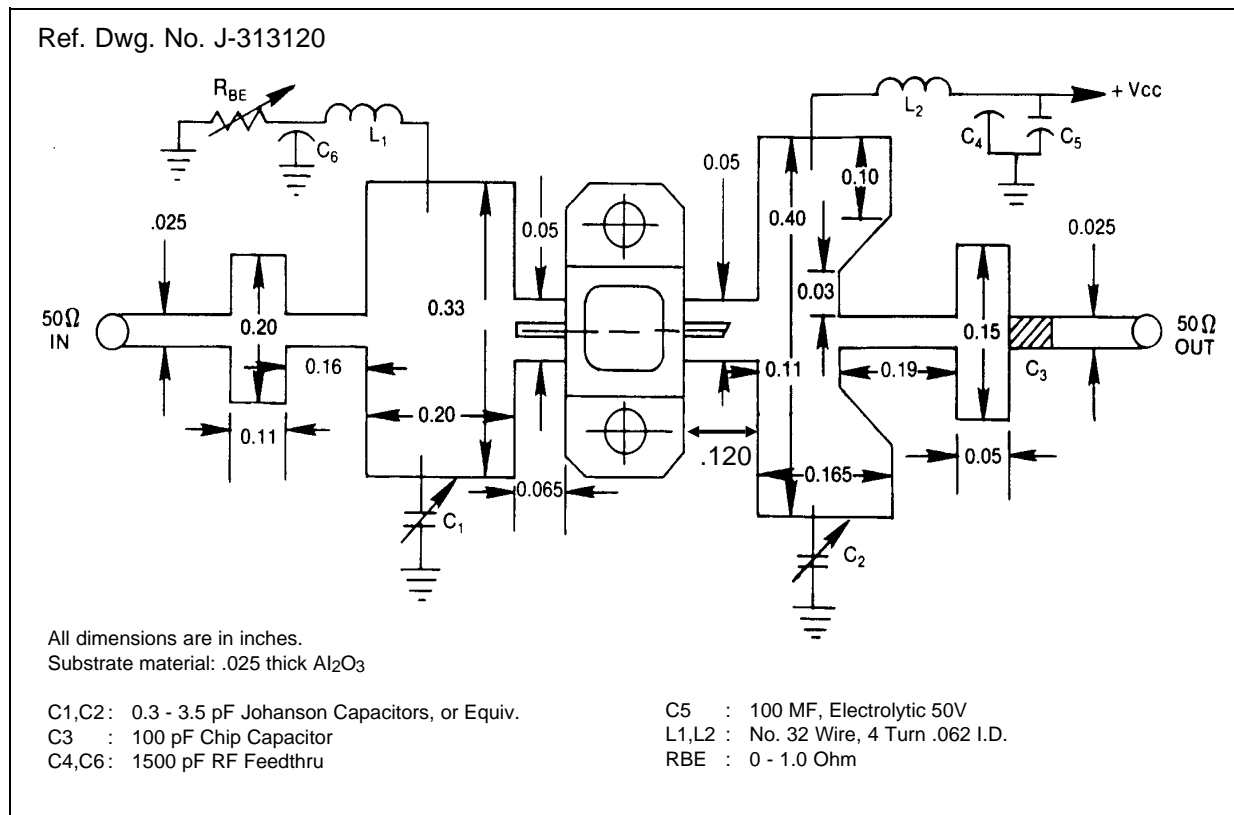

PACKAGE MECHANICAL DATA

Ref.: Dwg. No.: J113214F

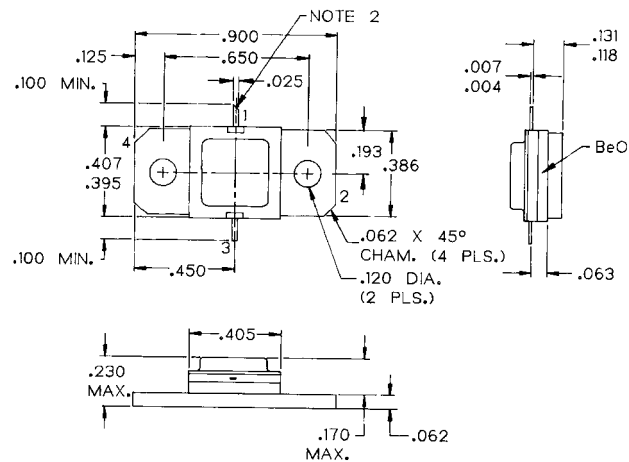

NOTES:

1. ALL TOLERANCE $\pm .010$ EXCEPT WHERE NOTED;
DIMENSIONS IN INCHES.
2. COLLECTOR LEAD SLANT CUT.

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may results from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A