

Applications

- Set-top boxes
- Telecom switching
- Oscillator replacement
- MPEG Video clock source

General Description

The Vaishali VT73227 is a single-chip, low-jitter Voltage-Controlled-Crystal-Oscillator. The device accepts a 27 MHz, 20 pF (pull range of 200 ppm) crystal input, and produces a low jitter output at the same frequency. A 0 to 3.0V control signal is used to fine tune the output clock frequency in the ± 100 ppm range.

Features

- 3.3V operating voltage
- Uses inexpensive pullable crystal
- 12mA drive capability at TTL levels
- On-chip oscillator with 200 ppm pull range (± 100 ppm)
- 8 pin SOIC package

Figure 1. Functional Block Diagram

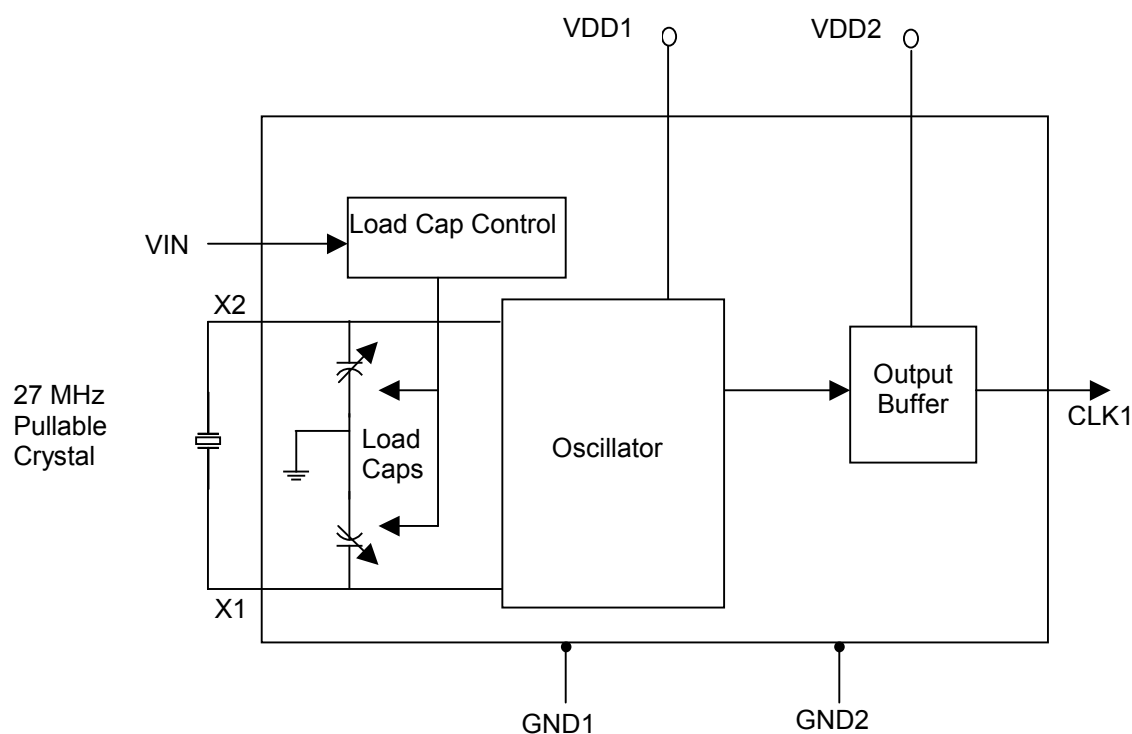
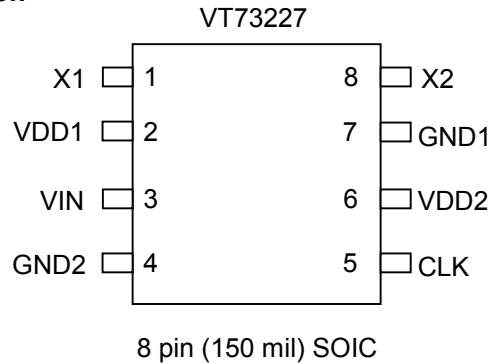


Figure 2. Pin Configuration**Table 1. Pin Description**

Name	Pin #	Type	Description
X1	1	Xi	Crystal connection. Connect to a 27 MHz pullable crystal
VDD1	2	P	Core V_{DD} . Connect to 3.3V
VIN	3	I	Voltage input to VCXO. Zero to 3.3V signal controls the frequency of the VCXO.
GND2	4	P	Connect to ground.
CLK	5	O	Clock output
VDD2	6	P	Pad driver V_{DD} . Connect to 3.3V
GND1	7	P	Connect to ground.
X2	8	Xi	Crystal connection. Connect to a 27 MHz pullable crystal.

Legend: I = Input
 O = Output
 P = Power supply connection
 Xi = Crystal connections.

Table 2. Absolute Maximum Ratings

Parameter	Conditions	Min	Typ	Max	Units
Supply voltage, V_{DD}	Referenced to GND			7	V
Inputs and Clock Outputs	Referenced to GND	-0.5		$V_{DD}+0.5$	V
Soldering Temperature	Max of 10 seconds			260	°C
Storage temperature		-65		150	°C

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. These ratings are stress specifications only and correct functional operation of the device at these or any other conditions above those listed in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect product reliability.

Table 3. Operating Conditions

Parameter	Conditions	Min	Typ	Max	Units
Operating Voltage, V_{DD}		3.15	3.3	3.45	V
Input High Voltage, V_{IH} , X1 pin only		2.5			V
Input Low Voltage, V_{IL} , X1 pin only				0.4	V
Operating Temperature		0		70	°C
Input crystal accuracy				±30	ppm
VCXO control voltage, V_{IN}		0		3.3	V

Table 4. DC Electrical Characteristics $T_A = 0^{\circ}\text{C to } +70^{\circ}\text{C}$, $V_{DD} = 3.15\text{ V to } 3.45\text{ V}$

Parameter	Condition	Min	Typ ⁽¹⁾	Max	Units
Output High Voltage, V_{OH}	$I_{OH} = -12\text{mA}$	2.4			V
Output Low Voltage, V_{OL}	$I_{OL} = 12\text{mA}$			0.4	V
Operating Supply Current, I_{DD}	No Load		25		mA
Short Circuit Current	Each output		± 85		mA
Input Capacitance			7		pF

Note:1. Typical values are at $V_{DD} = 3.3\text{V}$ and 25°C **Table 5. AC Electrical Characteristics** $T_A = 0^{\circ}\text{C to } +70^{\circ}\text{C}$, $V_{DD} = 3.15\text{ V to } 3.45\text{ V}$

Symbol	Parameter	Condition	Min	Typ	Max	Units
fosc	Input Crystal Frequency			27		MHz
t_r	Output Clock Rise Time	0.8 to 2.0V			1.5	ns
t_f	Output Clock Fall Time	2.0 to 0.8V			1.5	ns
t_{od}	Output Clock Duty Cycle	At $V_{DD}/2$	40		60	%
t_{jit} (pk – pk)	Maximum Absolute Jitter (Peak to Peak)				150	ps
	Output pullability	$0\text{V} \leq V_{IN} \leq 3.3\text{V}$	± 100			ppm

Note:1. Typical values are at $V_{DD} = 3.3\text{V}$ and 25°C **Table 6 Pullable Crystal Specifications**

Parameter	Symbol	Value
Correlation (Load) Capacitance	C_L	20pF
Capacitance Ratio	C_0/C_1	240 max
ESR		50 Ω max
Initial Accuracy		$\pm 30\text{ppm}$
Temperature and Aging Stability		$\pm 50\text{ppm}$

Ordering Information**VT73227**

Part Number	Marking	Shipping/Packaging	No. of Pins	Package	Temperature
VT73227-S1	VT73227-S1	Tubes	8	SOIC	$0^{\circ}\text{C to } +70^{\circ}\text{C}$
VT73227-S1X	VT73227-S1	Tape & Reel	8	SOIC	$0^{\circ}\text{C to } +70^{\circ}\text{C}$
VT73227-/D	-	Die			$0^{\circ}\text{C to } +70^{\circ}\text{C}$