


## Single-Phase Single In-Line Bridge Rectifier

**Reverse Voltage** 200 to 800V  
**Forward Current** 15A

**Case Style GSIB-5S**

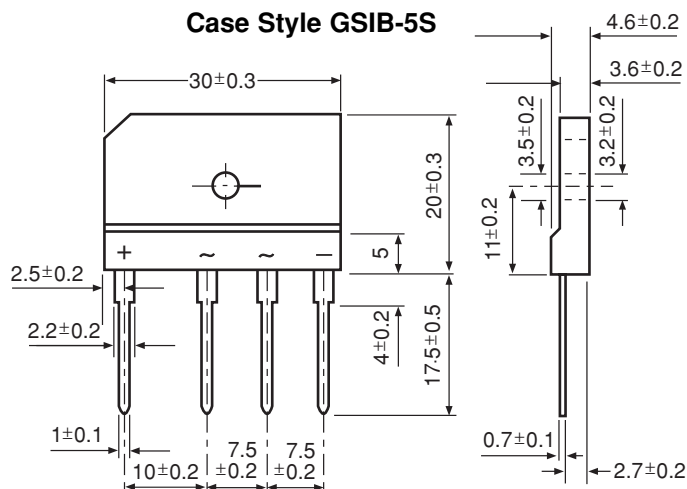

Dimensions in millimeters

## Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- This series is UL listed under Recognized Component Index, file number E54214.
- High case dielectric strength of 2500 VRMS
- Ideal for printed circuit boards
- Glass passivated chip junction
- High surge current capability
- High temperature soldering guaranteed: 260°C/10 seconds, 0.375 (9.5mm) lead length, 5lbs. (2.3kg) tension

## Mechanical Data

**Case:** GSIB-5S Molded plastic body

**Terminals:** Plated leads solderable per MIL-STD-750, Method 2026

**Mounting Position:** Any (Note 3)

**Mounting Torque:** 8 in-lbs max.

**Weight:** 0.26 oz., 7.0 g

## Maximum Ratings & Thermal Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)

Parameter	Symbol	GSIB 15A20	GSIB 15A40	GSIB 15A60	GSIB 15A80	Unit
Maximum repetitive peak reverse voltage	V <sub>RRM</sub>	200	400	600	800	V
Maximum RMS voltage	V <sub>RMS</sub>	140	280	420	560	V
Maximum DC blocking voltage	V <sub>DC</sub>	200	400	600	800	V
Maximum average forward rectified output current at T <sub>C</sub> = 107°C <sup>(1)</sup> T <sub>A</sub> = 25°C <sup>(2)</sup>	I <sub>F(AV)</sub>	15 3.5				A
Peak forward surge current single sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	200				A
Rating for fusing (t < 8.3ms)	I <sup>2</sup> t	166				A <sup>2</sup> sec
Maximum thermal resistance per leg	R <sub>θJA</sub> R <sub>θJC</sub>	22 <sup>(2)</sup> 1.5 <sup>(1)</sup>				°C/W
Operating junction and storage temperature range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150				°C

## Electrical Characteristics (T<sub>A</sub> = 25°C unless otherwise noted)


Parameter	Symbol	GSIB 15A20	GSIB 15A40	GSIB 15A60	GSIB 15A80	Unit
Maximum instantaneous forward voltage drop per leg at 7.5A	V <sub>F</sub>	1.00				V
Maximum DC reverse current at T <sub>A</sub> = 25°C rated DC blocking voltage per leg T <sub>A</sub> = 125°C	I <sub>R</sub>	10 250				μA

### Notes:


- (1) Unit case mounted on Al plate heatsink.
- (2) Units mounted on P.C.B. without heatsink
- (3) Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw

## Ratings and Characteristic Curves ( $T_A = 25^\circ\text{C}$ unless otherwise noted)


**Fig. 1 - Derating Curve Output Rectified Current**

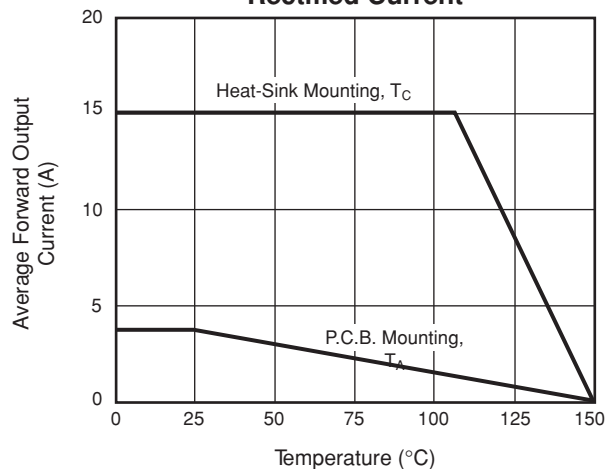


**Fig. 2 - Maximum Non-Repetitive Peak Forward Surge Current Per Leg**

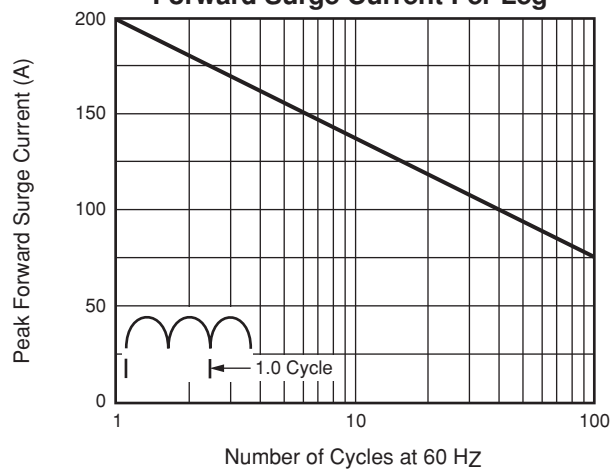


**Fig. 3 - Typical Forward Characteristics Per Leg**

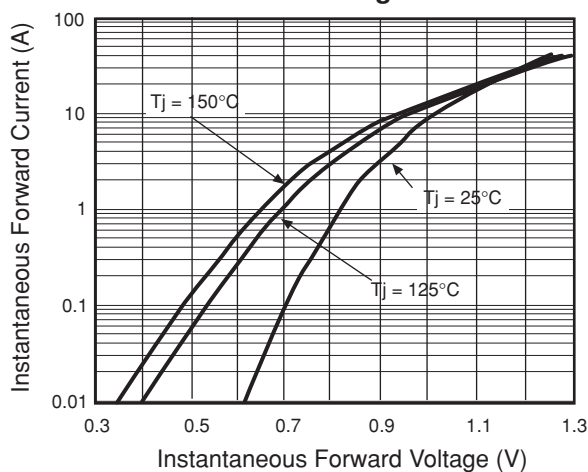

**Fig. 4 - Typical Reverse Characteristics Per Leg**

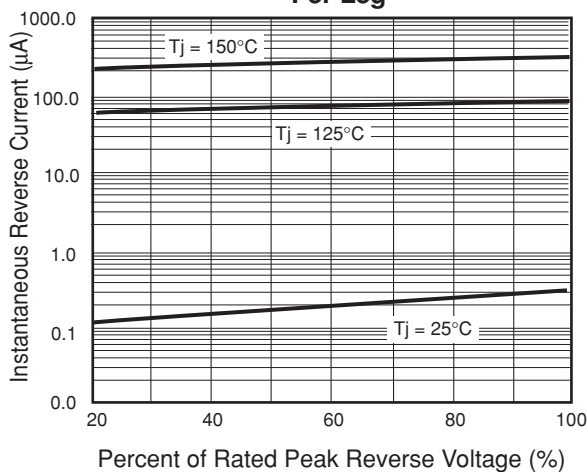

**Fig. 5 - Typical Junction Capacitance Per Leg**

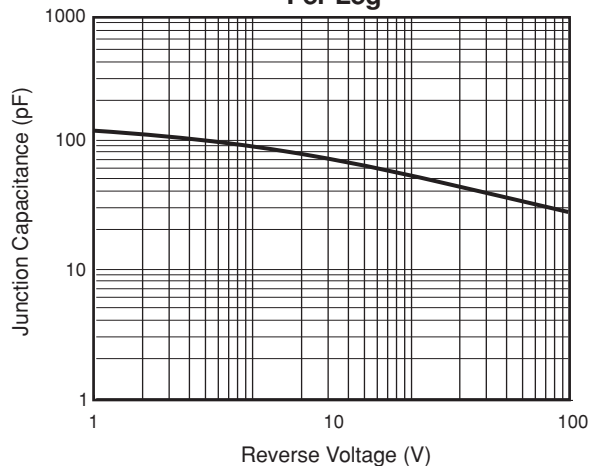

**Fig. 6 - Typical Transient Thermal Impedance**

