


c<sub>us</sub>  
RoHS

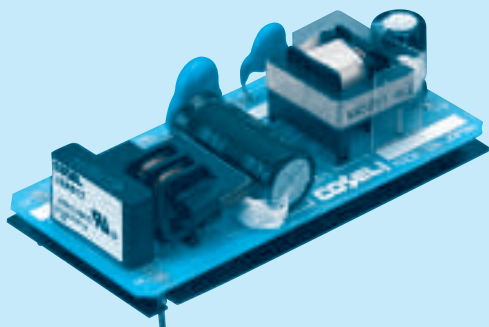

① Series name  
② Output wattage  
③ Output voltage

MODEL	VAA505	VAA512
MAX OUTPUT WATTAGE[W]	5.0	5.4
DC OUTPUT	VOLTAGE[V]	5
	CURRENT[A]	1.0
		12
		0.45

## SPECIFICATIONS



	MODEL	VAA505	VAA512
INPUT	VOLTAGE[V]	AC85 - 132 1 $\phi$ or DC110 - 170	
	CURRENT[A]	*1 0.13typ (ACIN 100V, Io=100%)	
	EFFICIENCY[%]	*1 75typ	77typ
	FREQUENCY[Hz]	47 - 440 or DC	
	INRUSH CURRENT[A]	*1 15typ (ACIN 100V, Io=100%)	
	LEAKAGE CURRENT[ma]	0.5max (60Hz According to UL and DEN-AN)	
OUTPUT	VOLTAGE[V]	5	12
	CURRENT[A]	1.0	0.45
	LINE REGULATION[mV]	20max	48max
	LOAD REGULATION[mV]	40max	100max
	RIPPLE[mVp-p]	0 to +55°C *2 80max	120max
		-10 - 0°C *2 140max	160max
	RIPPLE NOISE[mVp-p]	0 to +55°C *2 120max	150max
		-10 - 0°C *2 160max	180max
	TEMPERATURE COEFFICIENT[mV]	-10 to +55°C 50max	120max
	DRIFT[mV]	*3 20max	48max
	OUTPUT VOLTAGE ADJUSTMENT RANGE	Fixed	
PROTECTION CIRCUIT	START-UP TIME[ms]	200max (ACIN 85V, Io=100%)	
	HOLD-UP TIME[ms]	10typ (ACIN 85V, Io=100%), 20typ (ACIN 100V, Io=100%)	
	OUTPUT VOLTAGE SETTING[V]	*1 4.90 - 5.30	11.40 - 12.60
	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically	
ISOLATION	OVERVOLTAGE PROTECTION	Works over 115% of rating (by zener diode clamping)	
	INPUT-OUTPUT	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M $\Omega$ min (At Room Temperature)	
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M $\Omega$ min (At Room Temperature)	
ENVIRONMENT	OUTPUT-FG	AC500V 1minute, Cutoff current = 100mA, DC500V 50M $\Omega$ min (At Room Temperature)	
	OPERATING TEMP., HUMID. AND ALTITUDE	-10 to +70°C, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max	
	VIBRATION	19.6m/s <sup>2</sup> 10 - 55Hz, 3minutes period, 60minutes each along X, Y and Z axis (Non operating)	
	IMPACT	196.1m/s <sup>2</sup> 11ms, once each X, Y and Z axis (Non operating)	
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL60950-1, C-UL Complies with DEN-AN (External Fuse is required)	
	CONDUCTED NOISE	Complies with FCC-B, additional capacitors required for meeting VCCI class B	
OTHERS	CASE SIZE/WEIGHT	32 x 18 x 65mm (W x H x D) / 30g max	
	COOLING METHOD	Convection	

\*1 Rated input/output Ta=25°C

\*2 This is the value that measured on measuring board with capacitor of 22  $\mu$ F. Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM101).


\*3 Drift is the charge in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

## External view

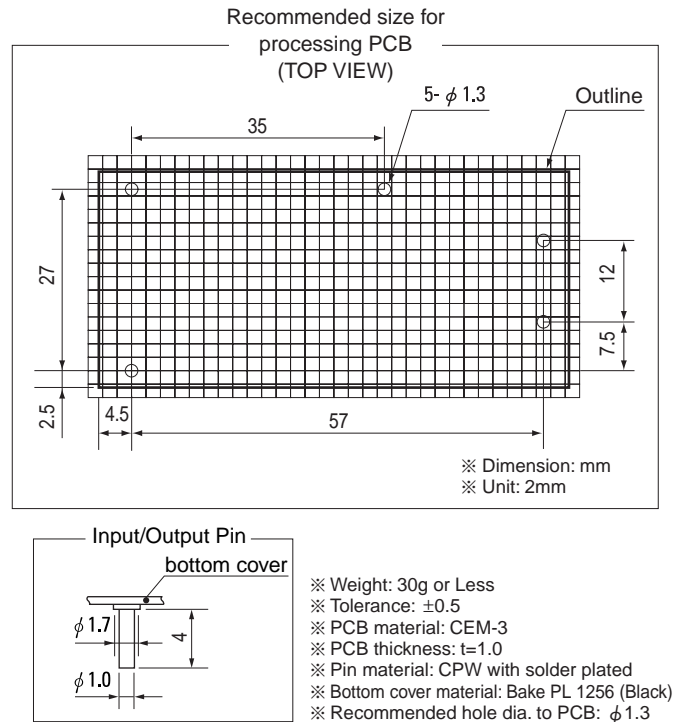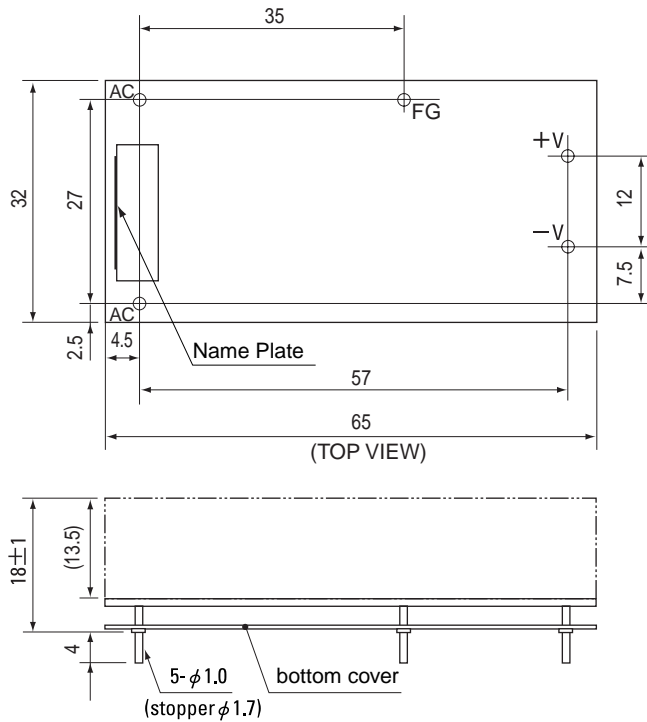


## Performance data


## ■ STATIC CHARACTERISTICS (VAA512)

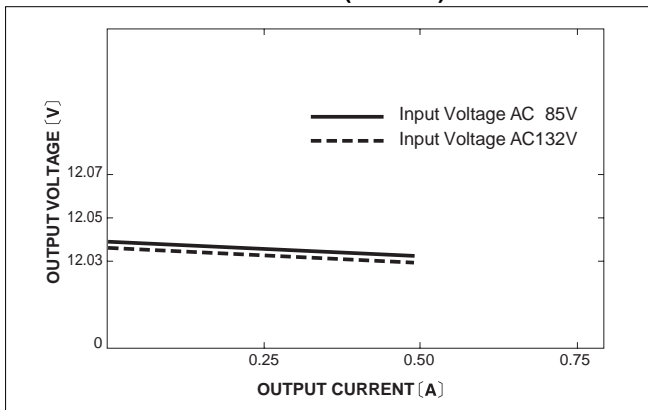


## ■ RISE TIME &amp; FALL TIME (VAA512)

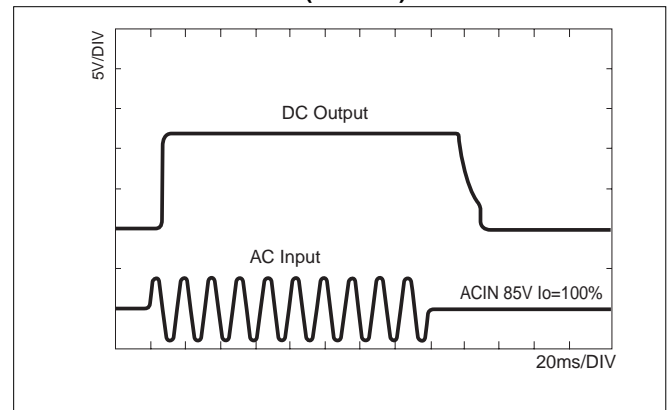

## ■ OVERCURRENT CHARACTERISTICS (VAA512)

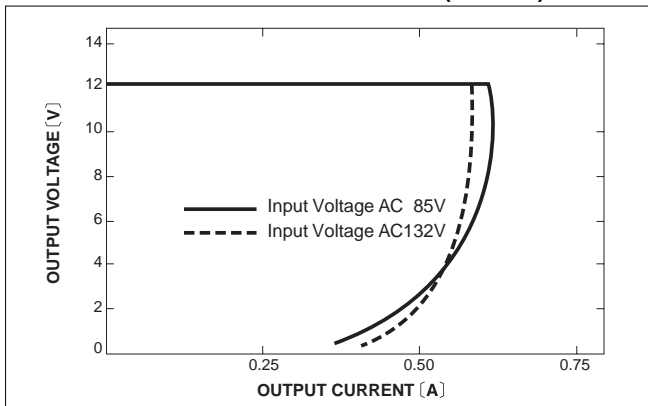


## ■ DERATING CURVE

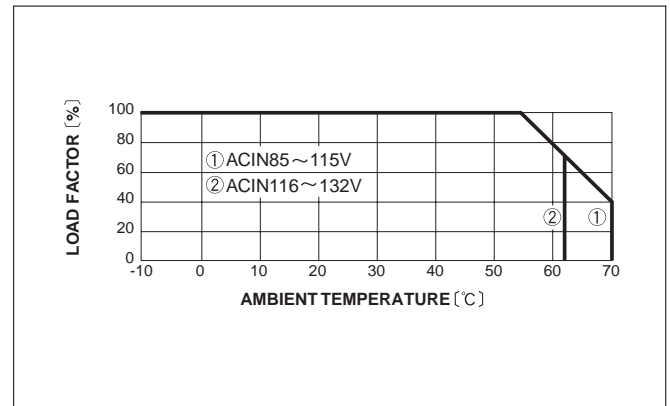

**VAA10****VAA 10 05**

① ② ③

**RoHS**

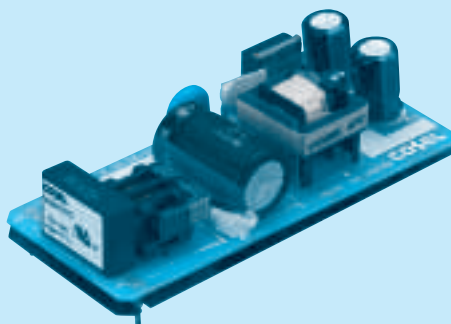

① Series name  
② Output wattage  
③ Output voltage

MODEL	VAA1005	VAA1012
MAX OUTPUT WATTAGE[W]	10.0	10.8
DC OUTPUT	VOLTAGE[V] 5	12
	CURRENT[A] 2.0	0.9

## SPECIFICATIONS





	MODEL	VAA1005	VAA1012
INPUT	VOLTAGE[V]	AC85 - 132 1 $\phi$ or DC110 - 170	
	CURRENT[A]	*1 0.3typ (ACIN 100V, Io=100%)	
	EFFICIENCY[%]	*1 76typ	
	FREQUENCY[Hz]	47 - 440 or DC	
	INRUSH CURRENT[A]	*1 15typ (ACIN 100V, Io=100%)	
	LEAKAGE CURRENT[ma]	0.5max (60Hz According to UL and DEN-AN)	
OUTPUT	VOLTAGE[V]	5	12
	CURRENT[A]	2.0	0.9
	LINE REGULATION[mV]	20max	48max
	LOAD REGULATION[mV]	40max	100max
	RIPPLE[mVp-p]	0 to +55°C *2 80max -10 - 0°C *2 140max	120max 160max
	RIPPLE NOISE[mVp-p]	0 to +55°C *2 120max -10 - 0°C *2 160max	150max 180max
	TEMPERATURE COEFFICIENT[mV]	-10 to +55°C 50max	120max
	DRIFT[mV]	*3 20max	48max
	OUTPUT VOLTAGE ADJUSTMENT RANGE	Fixed	
	START-UP TIME[ms]	200max (ACIN 85V, Io=100%)	
	HOLD-UP TIME[ms]	10typ (ACIN 85V, Io=100%), 20typ (ACIN 100V, Io=100%)	
	OUTPUT VOLTAGE SETTING[V]	*1 4.90 - 5.30	11.40 - 12.60
PROTECTION CIRCUIT	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically	
	OVERVOLTAGE PROTECTION	Works over 115% of rating (by zener diode clamping)	
ISOLATION	INPUT-OUTPUT	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M $\Omega$ min (At Room Temperature)	
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M $\Omega$ min (At Room Temperature)	
	OUTPUT-FG	AC500V 1minute, Cutoff current = 100mA, DC500V 50M $\Omega$ min (At Room Temperature)	
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	-10 to +70°C, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max	
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75°C, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max	
	VIBRATION	19.6m/s <sup>2</sup> 10 - 55Hz, 3minutes period, 60minutes each along X, Y and Z axis (Non operating)	
	IMPACT	196.1m/s <sup>2</sup> 11ms, once each X, Y and Z axis (Non operating)	
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	UL60950-1, C-UL Complies with DEN-AN (External Fuse is required)	
	CONDUCTED NOISE	Complies with FCC-B, additional capacitors required for meeting VCCI class B	
OTHERS	CASE SIZE/WEIGHT	32 x 18 x 72.5mm (W x H x D) / 35g max	
	COOLING METHOD	Convection	

\*1 Rated input/output Ta=25°C

\*2 This is the value that measured on measuring board with capacitor of 22  $\mu$ F. Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM101).

\*3 Drift is the charge in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.


## External view

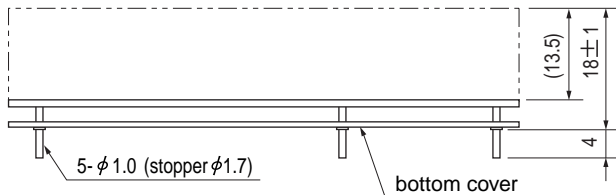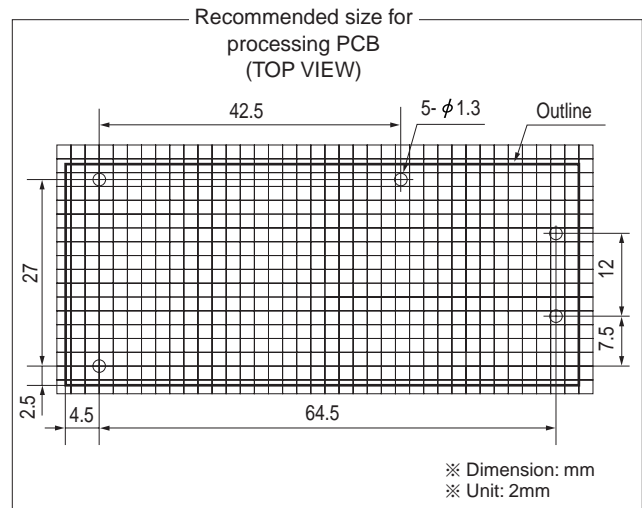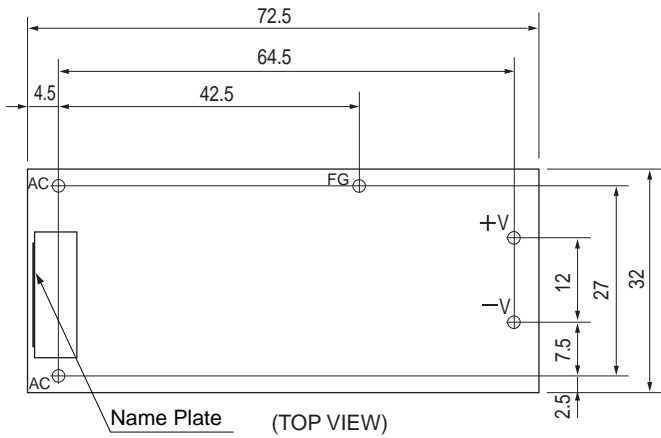


- ※ Weight: 35g or Less
- ※ Tolerance:  $\pm 0.5$
- ※ PCB material: CEM-3
- ※ PCB thickness:  $t=1.0$
- ※ Pin material: CPW with solder plated
- ※ Bottom cover material: Bake PL 1256 (Black)
- ※ Recommended hole dia. to PCB:  $\phi 1.3$

## Performance data


## ■ STATIC CHARACTERISTICS (VAA1012)

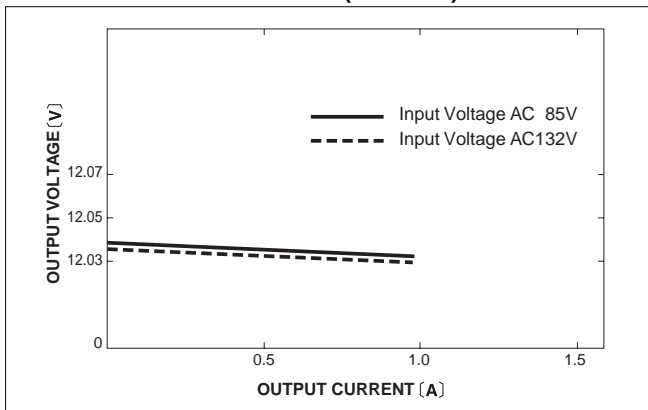

## ■ RISE TIME &amp; FALL TIME (VAA1012)

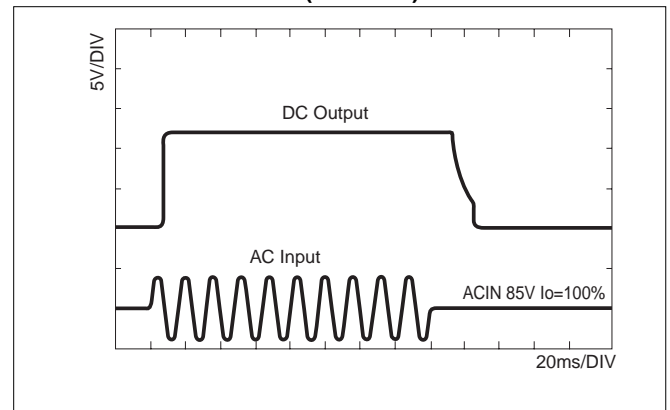

## ■ OVERCURRENT CHARACTERISTICS (VAA1012)

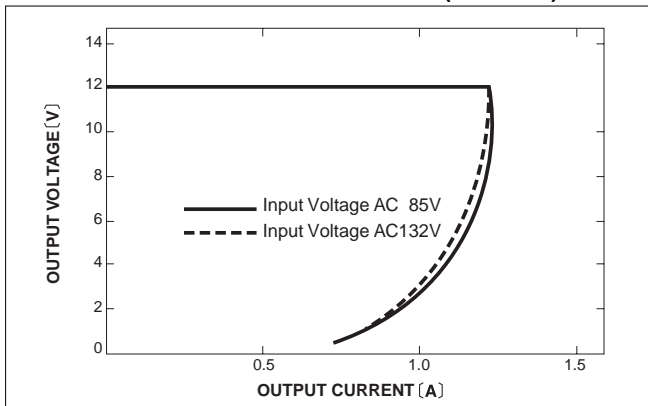

## ■ DERATING CURVE

