

**SUPER FAST  
GLASS PASSIVATED RECTIFIERS**


REVERSE VOLTAGE - **100 to 200** Volts  
FORWARD CURRENT - **16** Amperes

**FEATURES**

- Glass passivated chip
- Superfast switching time for high efficiency
- Low forward voltage drop and high current capability
- Low reverse leakage current
- High surge capacity
- Plastic package has UL flammability classification 94V-0

**MECHANICAL DATA**

- Case : TO-220AB molded plastic
- Polarity : As marked on the body
- Weight : 0.08 ounces, 2.24 grams
- Mounting position : Any

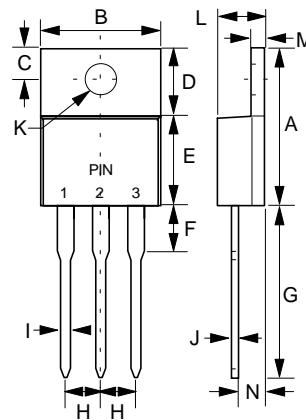**TO-220AB**


TO-220AB		
DIM.	MIN.	MAX.
A	14.22	15.88
B	9.65	10.67
C	2.54	3.43
D	5.84	6.86
E	8.26	9.28
F	-	6.35
G	12.70	14.73
H	2.29	2.79
I	0.51	1.14
J	0.30	0.64
K	3.53 $\varnothing$	4.09 $\varnothing$
L	3.56	4.83
M	1.14	1.40
N	2.03	2.92

All Dimensions in millimeter

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified.  
Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	STPR1610CT	STPR1620CT	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	100	200	V
Maximum RMS Voltage	V <sub>RMS</sub>	70	140	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	100	200	V
Maximum Average Forward Rectified Current @T <sub>C</sub> =120°C	I(AV)	16		A
Non Repetitive Peak Forward Surge Current Per Diode TP=10ms	I <sub>FSM</sub>	80		A
Sinusoidal (JEDEC Method) TP=8.3ms		90		
Maximum forward Voltage IF=8A@T <sub>J</sub> =25°C	V <sub>F</sub>	1.1		V
Pulse Width =300us IF=8A@T <sub>J</sub> =125°C		1.0		
Duty cycle IF=16A @T <sub>J</sub> =25°C		1.25		
IF=16A @T <sub>J</sub> =125°C		1.20		
Maximum DC Reverse Current @T <sub>J</sub> =25°C	I <sub>R</sub>	5		uA
at Rated DC Blocking Voltage @T <sub>J</sub> =100°C		100		
Typical Junction Capacitance per element (Note 1)	C <sub>J</sub>	80		pF
Maximum Reverse Recovery Time (Note 2)	T <sub>RR</sub>	30		ns
Typical Thermal Resistance	R <sub>θJC</sub>	3.0		°C/W
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>	-55 to +150		°C

NOTES : 1.Measured at 1.0MHz and applied reverse voltage of 4.0V DC.  
2.Reverse Recovery Test Conditions:IF=0.5A,IR=1.0A,IRR =0.25A.

REV. 4, 13-Sep-2001, KTGC06

FIG.1 - FORWARD CURRENT DERATING CURVE

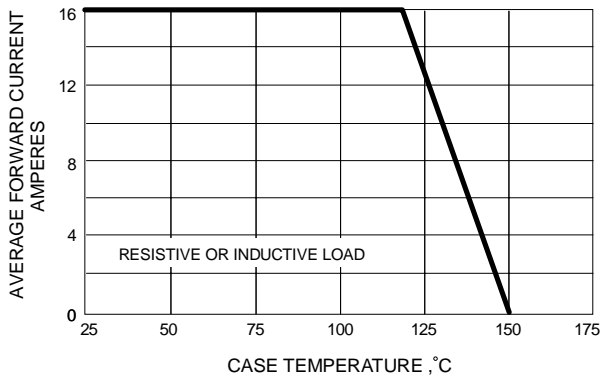


FIG.2 - MAXIMUM NON-REPETITIVE SURGE CURRENT

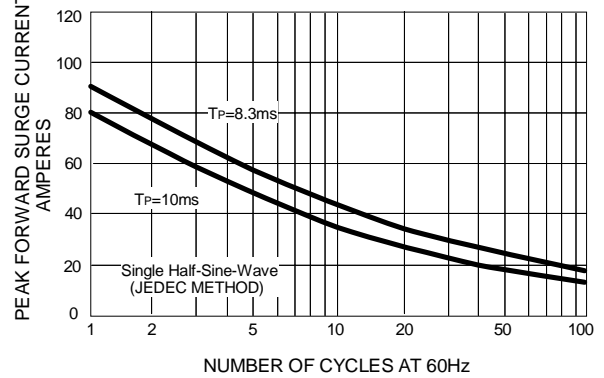


FIG.3 - TYPICAL REVERSE CHARACTERISTICS

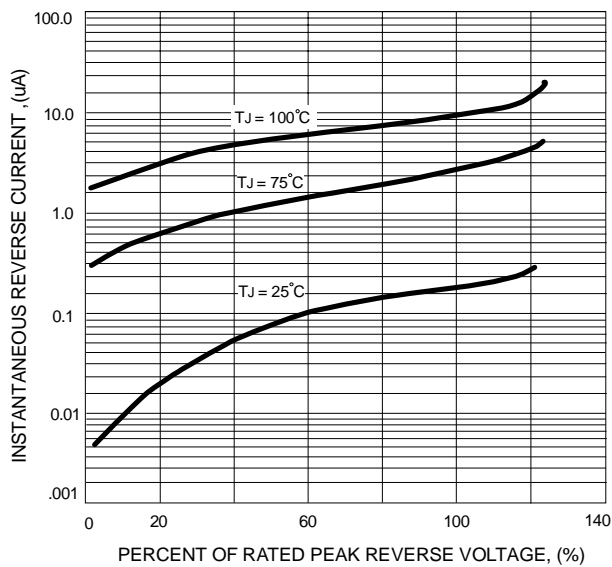


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

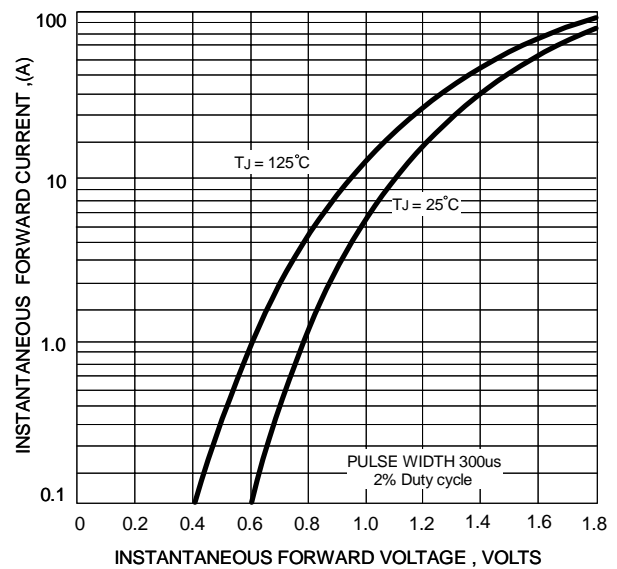


FIG.5 - TYPICAL JUNCTION CAPACITANCE

